


STANDARD GULLIES

P.062

GULLY 100x100,
OUTLET Ø 40 mm

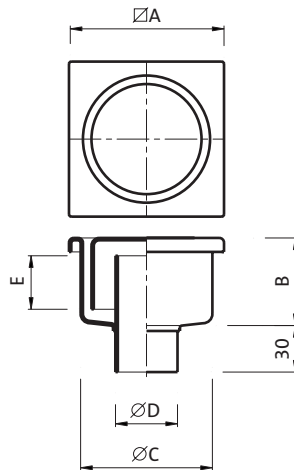


Features

Finish: **Sand-blast or polished**
Available with or without basket.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	□A	B	ØC	ØD	E	Concentrated load	Distributed load	
P 062	100	56	85	40	33	200	/	12

P.070

GULLY 150x150,
OUTLET Ø 50 mm

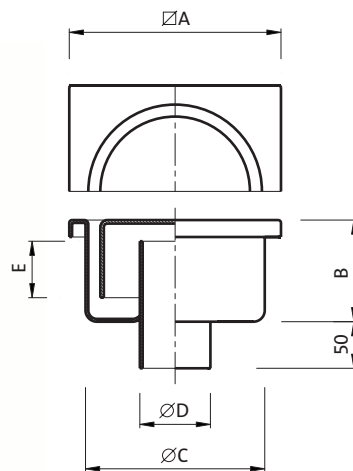


Features

Finish: **Sand-blast or polished**
Available with or without basket..

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	□A	B	ØC	ØD	E	Concentrated load	Distributed load	
P 070	150	75	126	50	33	400	/	38

P.024

GULLY 150x150,
OUTLET Ø 50 mm

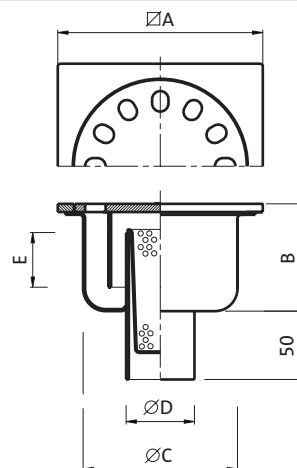


Features

Finish: **Sand-blast**
Also available with or without basket and with
cover fastened with a screw.
On request round model.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	□A	B	ØC	ØD	E	Concentrated load	Distributed load	
P 024	150	80	110	50	35	1000	5000	38

P.002

GULLY 200x200,
OUTLET Ø 63,5 mm

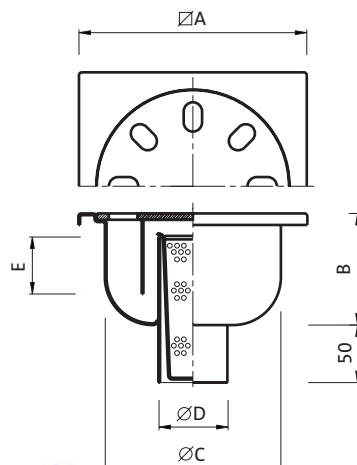


Features

Finish: **Sand-blast**
Also available with or without basket and with
cover fastened with a screw.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	□A	B	ØC	ØD	E	Concentrated load	Distributed load	
P 002	200	85	150	63,5	50	850	4600	46

P.016 GULLY 250x250,
OUTLET Ø 76/80 mm

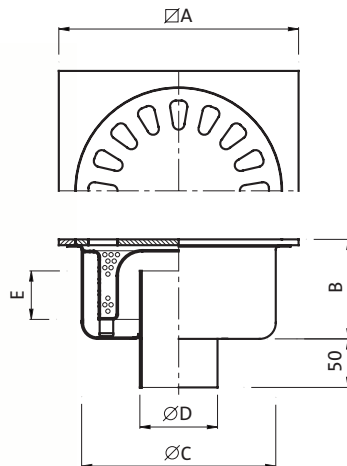

Features


Finish: **Sand-blast**

Also available: with or without basket, with cover fastened with a screw, and also with top plate of different thickness.

On request round model.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	ØA	B	ØC	ØD	E	Concentrated load	Distributed load	
P 016	250	115	195	76 80	50	850	6500	80

P.025 GULLY 250x250,
OUTLET Ø 76 mm
WITH REMOVABLE SIPHON

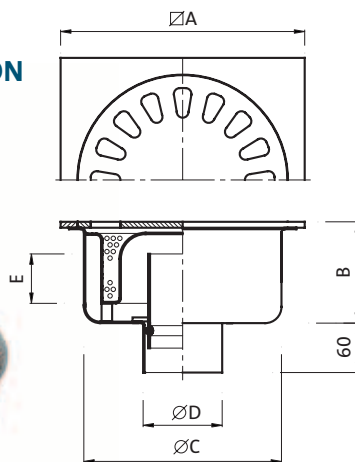

Features


Finish: **Sand-blast**

Also available: with or without basket, with cover fastened with a screw, and also with top plate of different thickness.

On request round model.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	ØA	B	ØC	ØD	E	Concentrated load	Distributed load	
P 025	250	115	195	76	50	850	6500	46

P.005 GULLY 300x300,
OUTLET Ø 101,6/110 mm

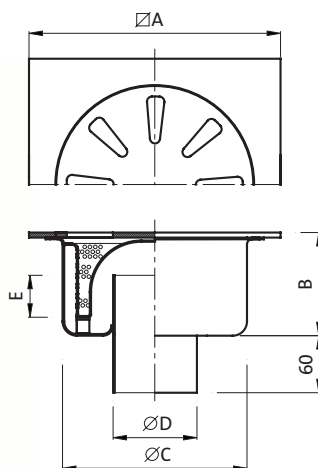

Features


Finish: **Sand-blast**

Also available: with or without basket, with cover fastened with a screw, and also with top plate of different thickness.

On request round model.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	ØA	B	ØC	ØD	E	Concentrated load	Distributed load	
P 005	300	126	220	101,6 110	60	850	6500	130

P.026 GULLY 300x300,
OUTLET Ø 110 mm
WITH REMOVABLE SIPHON

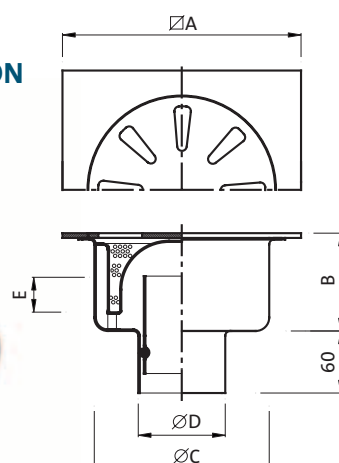

Features

Finish: **Sand-blast**

Also available: with or without basket, with cover fastened with a screw, and also with top plate of different thickness.


On request round model.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	ØA	B	ØC	ØD	E	Concentrated load	Distributed load	
P.026	300	126	220	110	60	850	6500	130

STANDARD GULLIES

P.007

REINFORCED GULLY 300x300
OUTLET Ø 101,6/110 mm

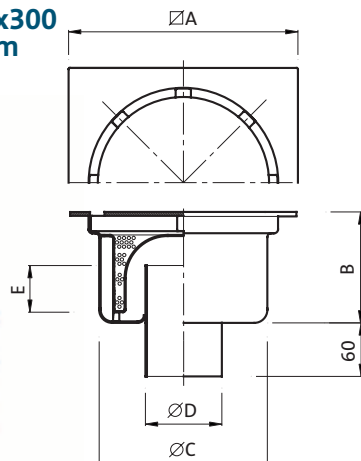

Features

Finish: **Sand-blast**


Also available: with or without basket, with cover fastened with a screw, and also with top plate of different thickness.

On request round model.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	□A	B	ØC	ØD	E	Concentrated load	Distributed load	
P007	300	145	220	101,6 110	60	1600	16400	130

P.020

GULLY 350x350
OUTLET Ø 154 mm

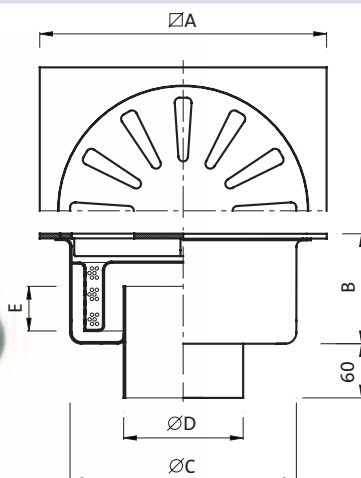

Features

Finish: **Sand-blast**


Also available: with or without basket, with cover fastened with a screw, and also with top plate of different thickness.

On request round model.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	□A	B	ØC	ØD	E	Concentrated load	Distributed load	
P020	350	150	290	154	60	600	4000	220

P.010

REINFORCED GULLY 400x400
OUTLET Ø 154 mm

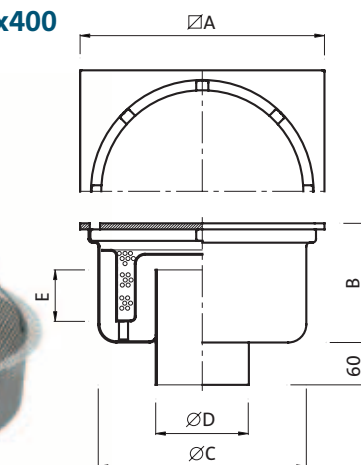

Features

Finish: **Sand-blast**


Also available: with or without basket, with cover fastened with a screw, and also with top plate of different thickness.

On request round model.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	□A	B	ØC	ØD	E	Concentrated load	Distributed load	
P 010	400	200	340	154	70	1900	14900	220

P.019

REINFORCED GULLY 500x500
OUTLET Ø 219 mm

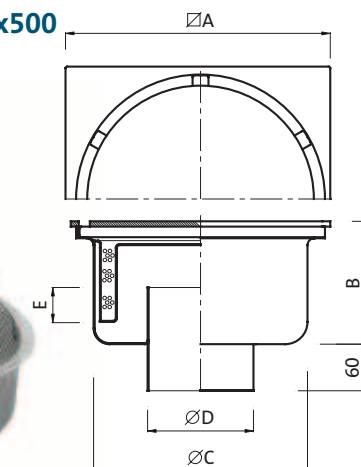

Features

Finish: **Sand-blast**


Also available: with or without basket, with cover fastened with a screw, and also with top plate of different thickness.

On request round model.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	□A	B	ØC	ØD	E	Concentrated load	Distributed load	
P 019	500	235	425	219	80	1900	14900	270

P.072

**GULLY 250x250
WITH SEPARATED BASKET
OUTLET \varnothing 76/80 mm**

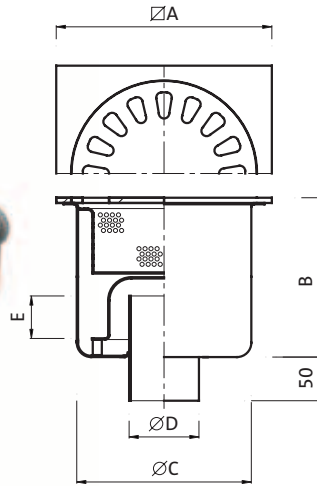

Features

Finish: **Sand-blast**


Also available with top plate of different thickness.

On request round model.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	\varnothing A	B	\varnothing C	\varnothing D	E	Concentrated load	Distributed load	
P.072	250	220	195	$\frac{76}{80}$	50	850	6500	80

P.074

**GULLY 300x300
WITH SEPARATED BASKET
OUTLET \varnothing 101,6/110 mm**

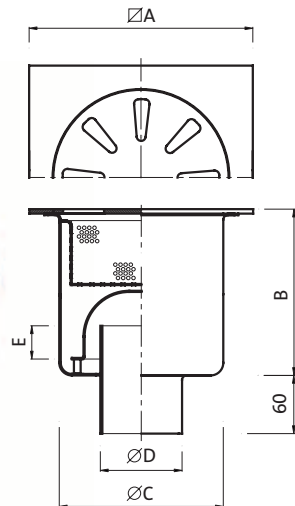

Features

Finish: **Sand-blast**


Also available with top plate of different thickness.

On request round model.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	\varnothing A	B	\varnothing C	\varnothing D	E	Concentrated load	Distributed load	
P.074	300	220	220	$\frac{101,6}{110}$	60	850	6500	130

P.076

**GULLY 350x350
WITH SEPARATED BASKET
OUTLET \varnothing 154 mm**

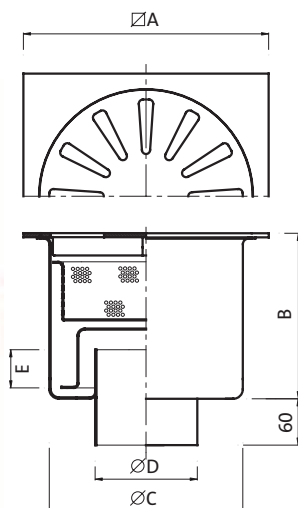

Features

Finish: **Sand-blast**

Also available with top plate of different thickness.


On request round model.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	\varnothing A	B	\varnothing C	\varnothing D	E	Concentrated load	Distributed load	
P.076	350	250	290	154	60	600	4000	220

STANDARD GULLIES

PGR.025080

**GULLY 250x250
GRATING COVER
OUTLET Ø 80 mm**

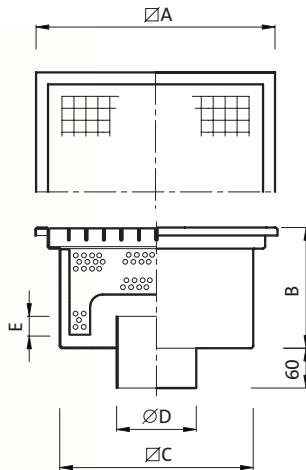

Features

Finish: **Sand-blast**

Standard grating cover:


bearing surface 25x3 mesh 22x22.

Also available with grating cover
in different mesh.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	ØA	B	ØC	ØD	E	80x80	120x120	
PGR. 025080	250	250	215	80	60	710	1250	80

PGR.030100

**GULLY 300x300
GRATING COVER
OUTLET Ø 101,6 mm**

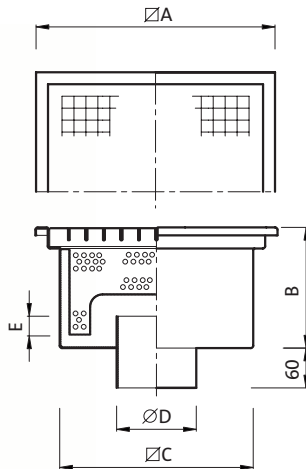

Features

Finish: **Sand-blast**

Standard grating cover:



bearing surface 25x3 mesh 22x22.

Also available with grating cover
in different mesh.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	ØA	B	ØC	ØD	E	80x80	120x120	
PGR. 030100	300	250	265	101,6	60	520	880	130

PGR.040154

**GULLY 400x400
GRATING COVER
OUTLET Ø 154 mm**

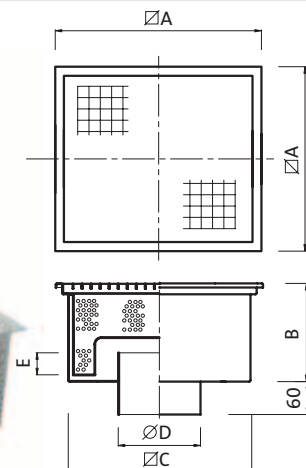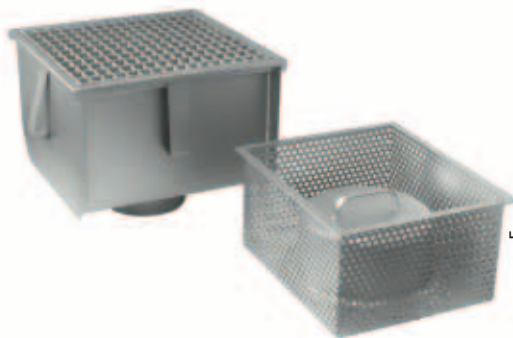

Features

Finish: **Sand-blast**

Standard grating cover:


bearing surface 25x3 mesh 22x22.

Also available with grating cover
in different mesh.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	ØA	B	ØC	ØD	E	80x80	120x120	
PGR. 040154	400	250	365	154	60	340	550	220

PGR.050219

**GULLY 500x500
GRATING COVER
OUTLET Ø 219 mm**

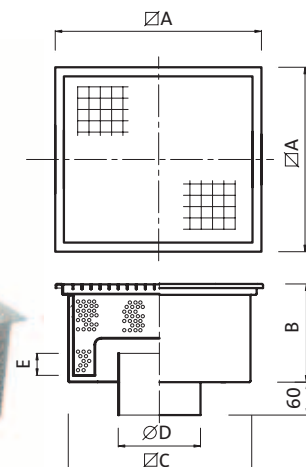

Features

Finish: **Sand-blast**


Standard grating cover:

bearing surface 30x3 mesh 22x22.

Also available with grating cover
in different mesh.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	ØA	B	ØC	ØD	E	80x80	120x120	
PGR. 050219	500	250	465	219	60	360	580	270

P.024C GULLY 150x150, OUTLET Ø 50 mm

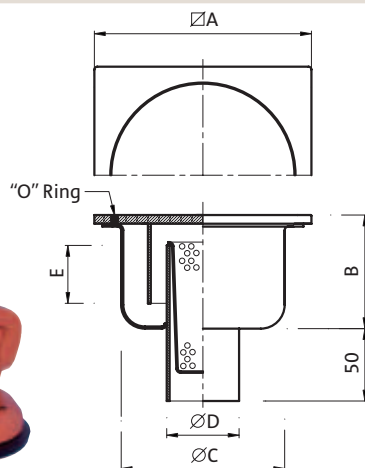


Features

Finish: **Sand-blast**

Also available: with or without basket, lower and round version, with cover fastened with a screw.
Sucker, accessory sell separately.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	□A	B	ØC	ØD	E	Concentrated load	Distributed load	
P 024C	150	80	110	50	35	1000	5000	38

P.002C GULLY 200x200, OUTLET Ø 63,5 mm

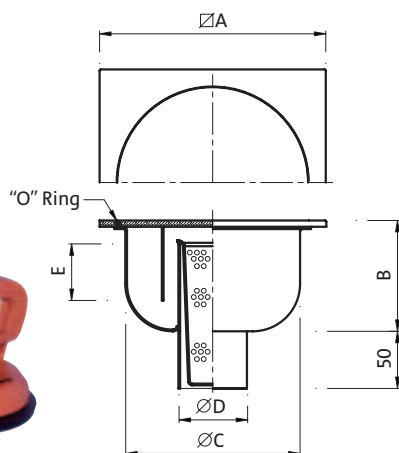


Features

Finish: **Sand-blast**

Also available: with or without basket, lower and round version, with cover fastened with a screw.
Sucker, accessory sell separately.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	□A	B	ØC	ØD	E	Concentrated load	Distributed load	
P 002C	200	85	150	63,5	50	850	4600	46

P.064 GULLY 250x250, OUTLET Ø 76/80 mm

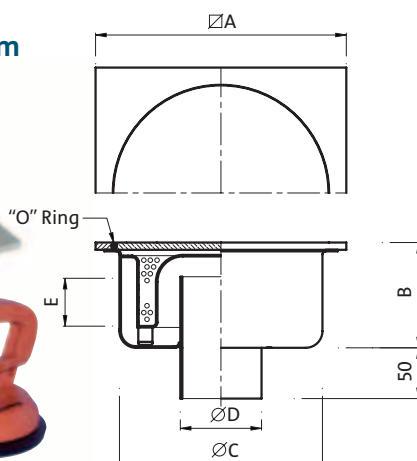


Features

Finish: **Sand-blast**

Also available: with or without basket, lower and round version, with cover fastened with a screw.
Sucker, accessory sell separately.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	□A	B	ØC	ØD	E	Concentrated load	Distributed load	
P.064	250	115	195	76 80	50	850	6500	80

P.065 GULLY 300x300, OUTLET Ø 101,6/110 mm

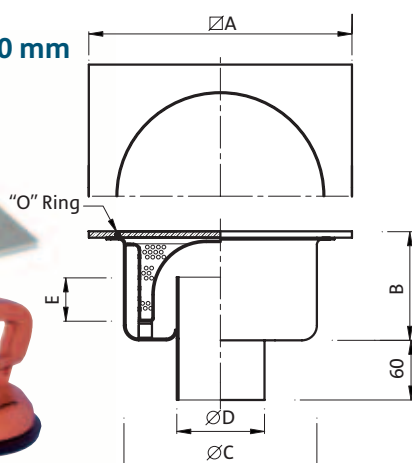

Features

Finish: **Sand-blast**


Also available: with or without basket, lower and round version, with cover fastened with a screw.
Sucker, accessory sell separately.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	□A	B	ØC	ØD	E	Concentrated load	Distributed load	
P.065	300	126	220	110 101,6	60	850	6500	130

GULLIES LOWER VERSION

P.066

**GULLY 100x100,
OUTLET Ø 40 mm**

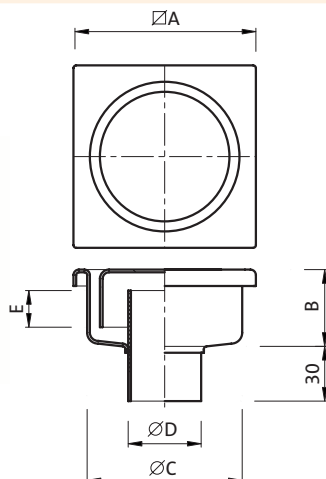


Features

Finish: **Sand-blast or polished**

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	□A	B	ØC	ØD	E	Concentrated load	Distributed load	
P 066	100	35	85	40	15	200		12

P.028

**GULLY 150x150,
OUTLET Ø 50 mm**

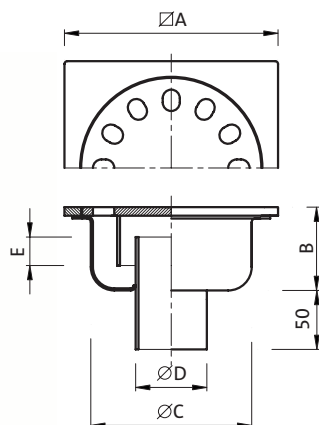

Features

Finish: **Sand-blast**


Also available with or without basket and with cover fastened with a screw.

On request round model.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	□A	B	ØC	ØD	E	Concentrated load	Distributed load	
P.028	150	55	110	50	20	1000	5000	38

P.014

**GULLY 200x200,
OUTLET Ø 63,5 mm**

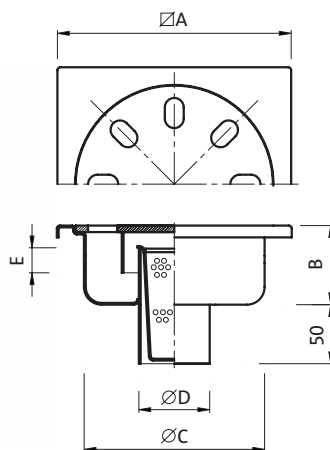

Features


Finish: **Sand-blast**

Also available with or without basket and with cover fastened with a screw.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	□A	B	ØC	ØD	E	Concentrated load	Distributed load	
P.014	200	50	150	63,5	25	850	4600	46

P.030

**GULLY 250x250,
OUTLET Ø 76/80 mm**

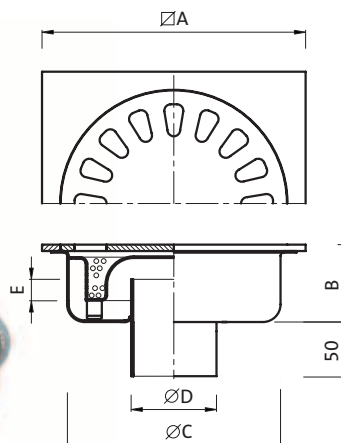

Features

Finish: **Sand-blast**


Also available with or without basket and with cover fastened with a screw.

On request round model.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	□A	B	ØC	ØD	E	Concentrated load	Distributed load	
P030	250	85	195	76/80	25	850	6500	80

P.006

**GULLY 300x300,
OUTLET Ø 101,6/110 mm**

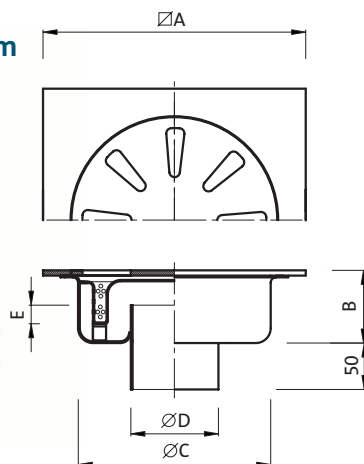

Features

Finish: **Sand-blast**


**Also available with or without basket and
with cover fastened with a screw.**

On request round model.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	∅A	B	∅C	∅D	E	Concentrated load	Distributed load	
P006	300	85	220	$\frac{101,6}{110}$	30	850	6500	130

P.012

**REINFORCED GULLY 300x300
OUTLET Ø 101,6/110 mm**

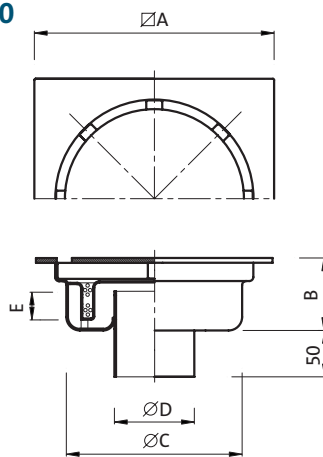

Features

Finish: **Sand-blast**

**Also available with or without basket and
with cover fastened with a screw.**


On request round model.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	∅A	B	∅C	∅D	E	Concentrated load	Distributed load	
P012	300	85	220	$\frac{101,6}{110}$	25	1600	16400	130

COVERS FOR GULLIES On request we produce specials executions


OPTIONAL FOR GULLY:

PGR.025080
PGR.030100
PGR.040154
PGR.050219




OPTIONAL FOR GULLY:

P.002 P.072
P.005 P.074
P.016 P.076
P.020 P.025
P.026 P.024



OPTIONAL FOR GULLY:

PGR.025080
PGR.030100
PGR.040154
PGR.050219




OPTIONAL FOR GULLY:

P.002 P.072
P.005 P.074
P.016 P.076
P.020 P.025
P.026 P.024



OPTIONAL FOR GULLY:

P.007
P.010
P.080



OPTIONAL FOR GULLY:



P.007
P.010
P.080



GULLIES HORIZONTAL OUTLET

P.066L

GULLY 100x100,
OUTLET Ø 40 mm

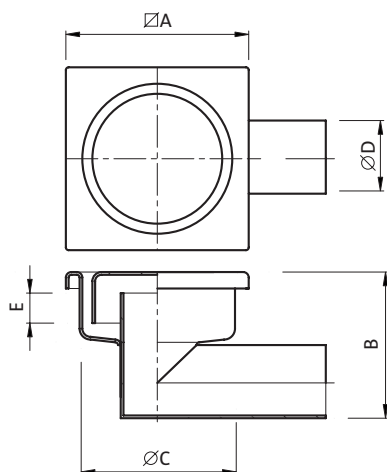



Features

Finish: **Sand-blast or polished.**

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	□A	B	ØC	ØD	E	Concentrated load	Distributed load	
P.066L	100	90	85	40	15	200		12
P.062L	100	105	85	40	33	200		12

P.028L

GULLY 150x150,
OUTLET Ø 50 mm

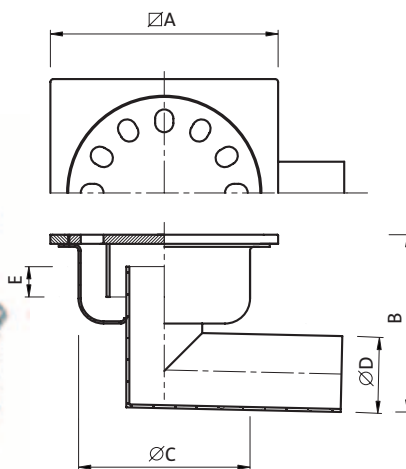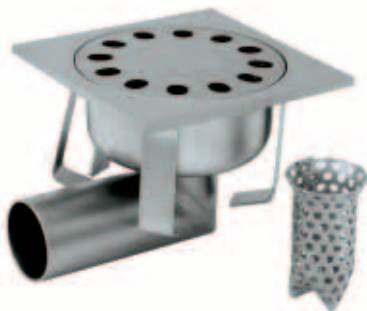

Features


Finish: **Sand-blast**

Also available with or without basket and with cover fastened with a screw.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	□A	B	ØC	ØD	E	Concentrated load	Distributed load	
P.028L	150	115	110	50	20	1000	5000	38
P.024L	150	130	110	50	35	1000	5000	38

P.014L

GULLY 200x200,
OUTLET Ø 63,5 mm

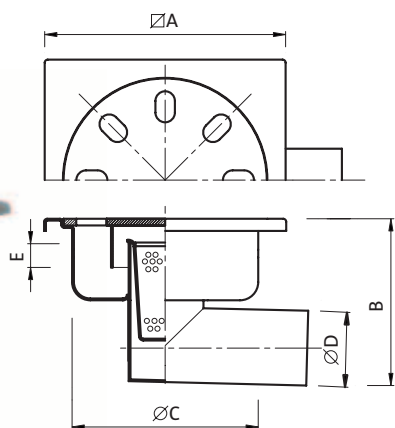

Features


Finish: **Sand-blast**

Also available with or without basket and with cover fastened with a screw.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	□A	B	ØC	ØD	E	Concentrated load	Distributed load	
P.014L	200	125	150	63,5	25	850	4600	46
P.002L	200	150	150	63,5	50	850	4600	46

P.030L

GULLY 250x250,
OUTLET Ø 76/80 mm

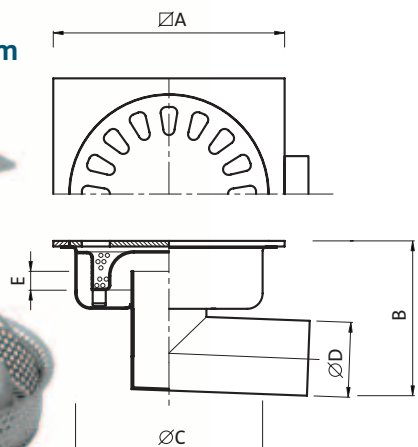

Features

Finish: **Sand-blast**


Also available with or without basket and with cover fastened with a screw.

On request round model.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	□A	B	ØC	ØD	E	Concentrated load	Distributed load	
P.030L	250	175	195	76	25	850	6500	80
P.016L	250	200	195	80	50	850	6500	80

P.030L/2

**GULLY 250x250,
OUTLET
Ø 76/80 mm**

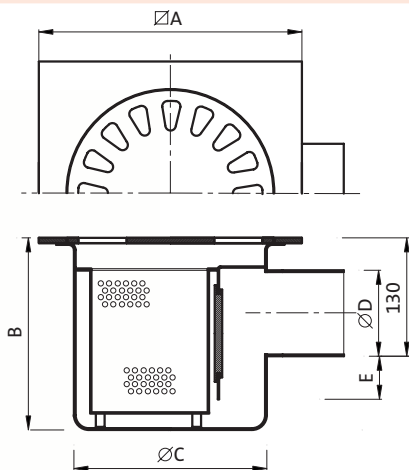

Features

Finish: **Sand-blast**


Also available with or without basket and with cover fastened with a screw.

On request round model.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity
	∅A	B	∅C	∅D	E	Concentrated load	Distributed load	Lt/min.
P030L/2	250	250	195	76 80	60	850	6500	80

P.006L

**GULLY 300x300,
OUTLET
Ø 101,6/110 mm**

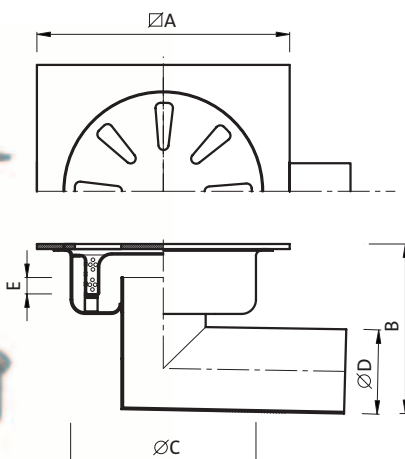

Features

Finish: **Sand-blast**


Also available with or without basket and with cover fastened with a screw.

On request round model.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity
	∅A	B	∅C	∅D	E	Concentrated load	Distributed load	Lt/min.
P.006L	300	200	220	101,6 110	30	850	6500	130
P.005L	300	240	220	101,6 110	60	850	6500	130

P.006L/2

**GULLY 300x300,
OUTLET
Ø 101,6/110 mm**

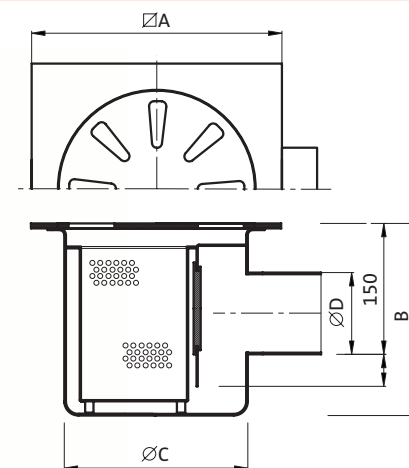

Features

Finish: **Sand-blast**


Also available with or without basket and with cover fastened with a screw.

On request round model.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity
	∅A	B	∅C	∅D	E	Concentrated load	Distributed load	Lt/min.
P006L/2	300	250	220	101,6 110	60	850	6500	130

P.012L

**REINFORCED
GULLY 300x300,
OUTLET
Ø 101,6/110 mm**

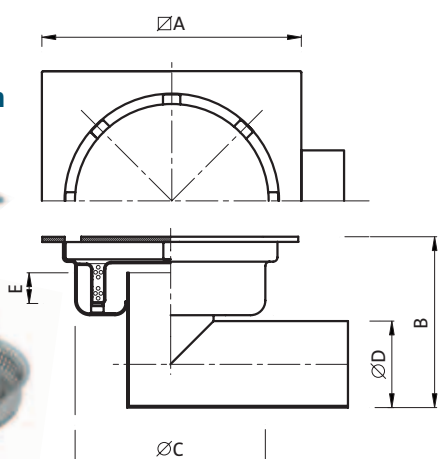

Features

Finish: **Sand-blast**

Also available with or without basket and with cover fastened with a screw.


On request round model.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity
	∅A	B	∅C	∅D	E	Concentrated load	Distributed load	Lt/min.
P.012L	300	200	220	101,6 110	25	1600	16400	130
P.007L	300	260	220	101,6 110	60	1600	16400	130

GULLIES WITH HORIZONTAL OUTLET

PGR.025080L

**GULLY 250x250,
GRATING COVER
OUTLET Ø 80 mm**

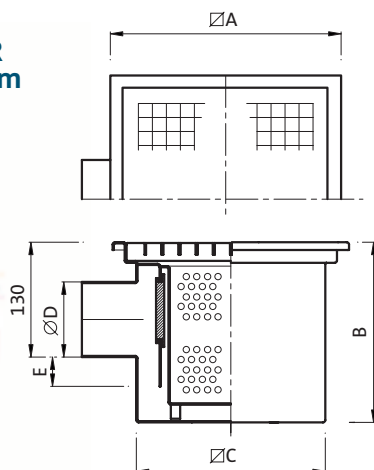

Features

Finish: **Sand-blast**


Standard grating cover: bearing surface 25x3 mesh 22x22.

Also available with grating cover in different mesh.

Item.	Main Measurements (mm)					Capacity (Kg)		Capacity
						Track of wheels		
	☐A	B	☐C	ØD	E	80x80	120x120	Lt/min.
PGR. 025080L	250	250	215	80	60	710	1250	80

PGR.030100L

**GULLY 300x300
GRATING COVER
OUTLET Ø 101,6 mm**

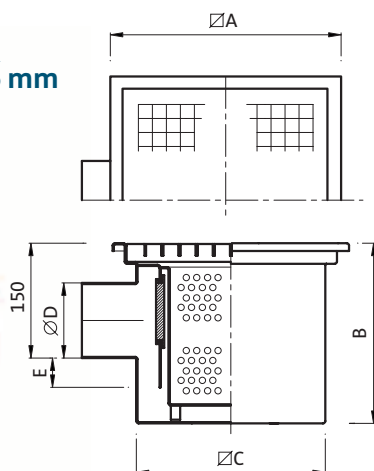

Features

Finish: **Sand-blast**



Standard grating cover: bearing surface 25x3 mesh 22x22.

Also available with grating cover in different mesh.

Item.	Main Measurements (mm)					Capacity (Kg)		Capacity
						Track of wheels		
	☐A	B	☐C	∅D	E	80x80	120x120	Lt/min.
PGR. 030100L	300	250	265	101,6	60	520	880	130

PGR.040154L

**GULLY 400x400
GRATING COVER
OUTLET Ø 154 mm**

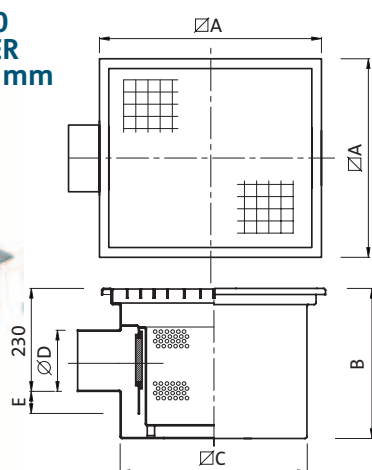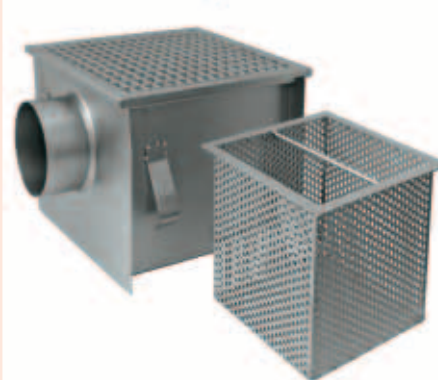

Features

Finish: **Sand-blast**



Standard grating cover: bearing surface 25x3 mesh 22x22.

Also available with grating cover in different mesh.

Item.	Main Measurements (mm)					Capacity (Kg)		Capacity
						Track of wheels		
	☐A	B	☐C	∅D	E	80x80	120x120	Lt/min.
PGR. 040154L	400	350	365	154	60	340	550	220

PGR.050219L

**GULLY 500x500
GRATING COVER
OUTLET Ø 219 mm**

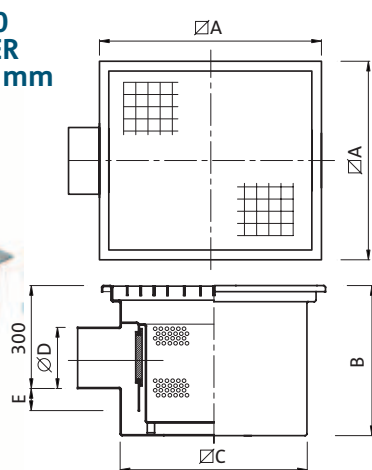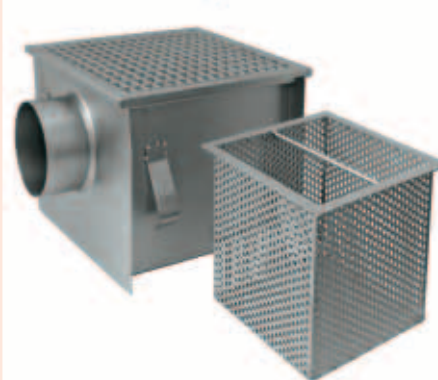

Features

Finish: **Sand-blast**


Standard grating cover: bearing surface 30x3 mesh 22x22.

Also available with grating cover in different mesh.

Item.	Main Measurements (mm)					Capacity (Kg)		Capacity
						Track of wheels		
	☐A	B	☐C	ØD	E	80x80	120x120	Lt/min.
PGR. 050219L	500	450	465	219	60	360	580	270

P.062T GULLY 100x100
OUTLET Ø 40 mm

P.070T

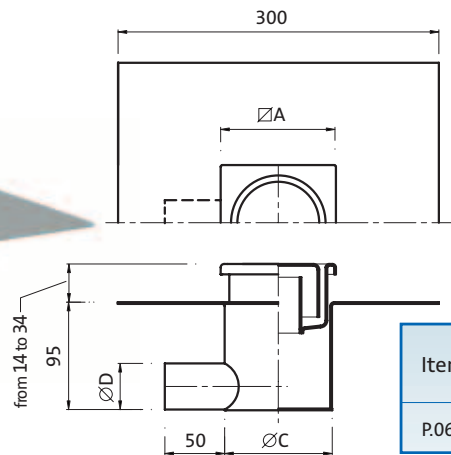

Features


Finish: **Sand-blast**

Also available with or without basket
and on request round model

Applicable for item **P. 070**

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	ØA	B	ØC	ØD	E	Concentrated load	Distributed load	
P.062T	100	Variable	90	40	33	200		12

P.002T GULLY 200x200
OUTLET Ø 63,5 mm

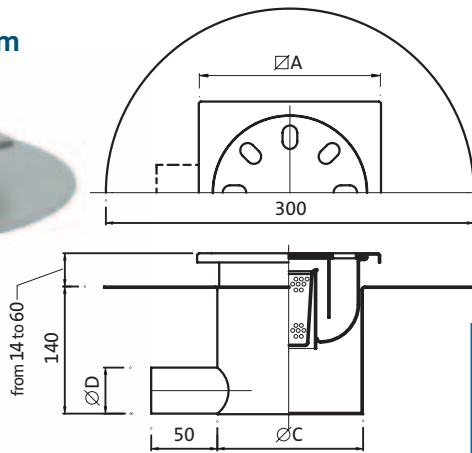


Features

Finish: **Sand-blast**

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	ØA	B	ØC	ØD	E	Concentrated load	Distributed load	
P002T	200	Variable	160	63,5	50	850	4600	46

P.005T GULLY 300x300
OUTLET
P.016T Ø 101,6/110 mm

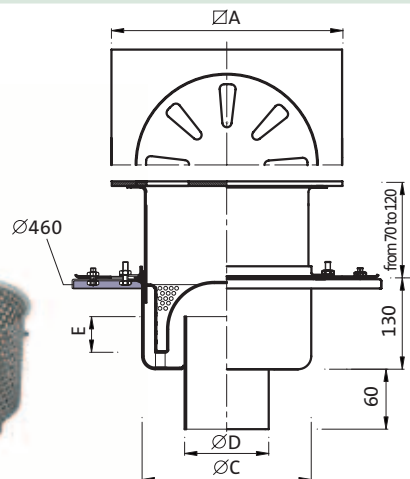

Features

Finish: **Sand-blast**


Also available with or without basket and on
request round model

Different heights if necessary.

Applicable for item **P. 016**

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	ØA	B	ØC	ØD	E	Concentrated load	Distributed load	
P005T	300	Variable	220	101,6 110	60	850	6500	130

P.007T GULLY 300x300
OUTLET
P.010T Ø 101,6/110 mm

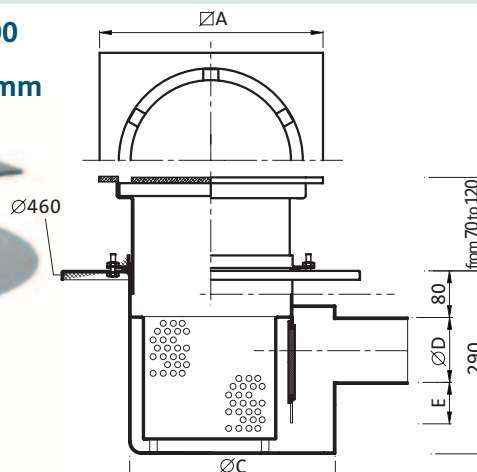

Features

Finish: **Sand-blast**

Also available with or without basket and on
request round model

Different heights if necessary.


Applicable for item **P. 010**

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	ØA	B	ØC	ØD	E	Concentrated load	Distributed load	
P.007T	300	Variable	250	101,6 110	60	1600	16400	130

ROUND GULLIES (several kinds)

P.042

GULLY Ø 100 mm
OUTLET Ø 40 mm

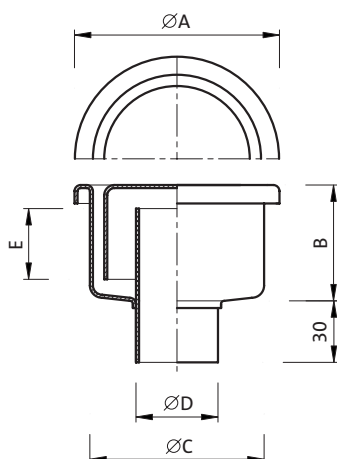

Features


Finish: **Sand-blast or polished**

Also available with or without basket.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	ØA	B	ØC	ØD	E	Concentrated load	Distributed load	
P042	100	56	85	40	33	200	-	12

P.031

GULLY Ø 100 mm
OUTLET Ø 40 mm

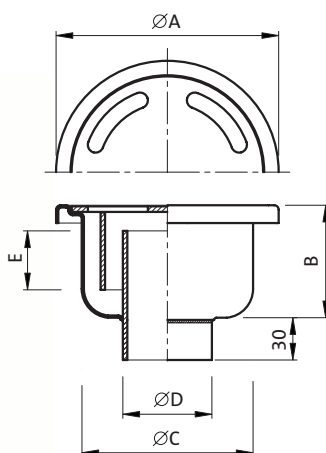

Features


Finish: **Sand-blast**

Also available with or without basket.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	ØA	B	ØC	ØD	E	Concentrated load	Distributed load	
P031	100	55	80	40	20	200	-	12

P.040

GULLY Ø 285 mm
OUTLET Ø 101,6/110 mm

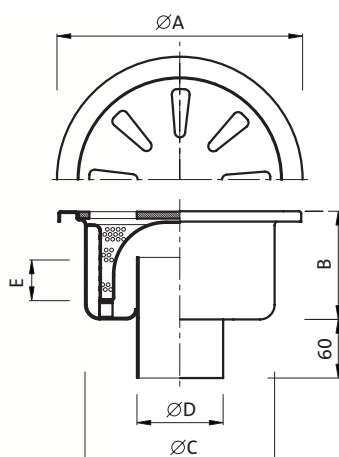

Features


Finish: **Sand-blast**

Also available with or without basket and with cover fastened with a screw.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	ØA	B	ØC	ØD	E	Concentrated load	Distributed load	
P040	285	130	220	$\frac{101,6}{110}$	60	950	7500	130

P.037

REINFORCED GULLY Ø 260 mm
OUTLET Ø 101,6/110 mm

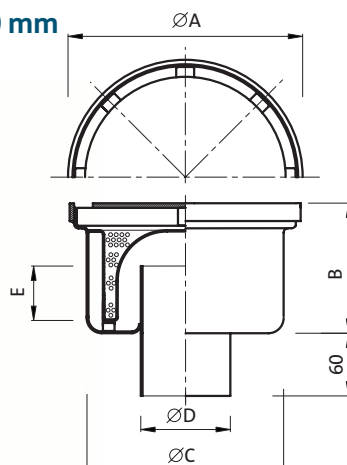

Features



Finish: **Sand-blast**

Also available with or without basket and with cover fastened with a screw.

On request lower version.

Item.	Main Measurements (mm)					Capacity (Kg)		Outlet capacity Lt/min.
	ØA	B	ØC	ØD	E	Concentrated load	Distributed load	
P037	260	150	220	$\frac{101,6}{110}$	60	1600	16400	130

ISP.12x12 LIGHT INSPECTION

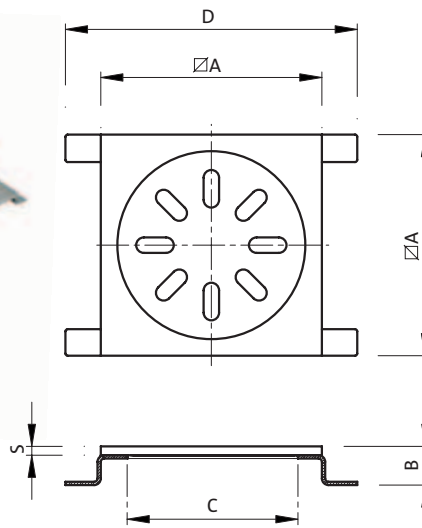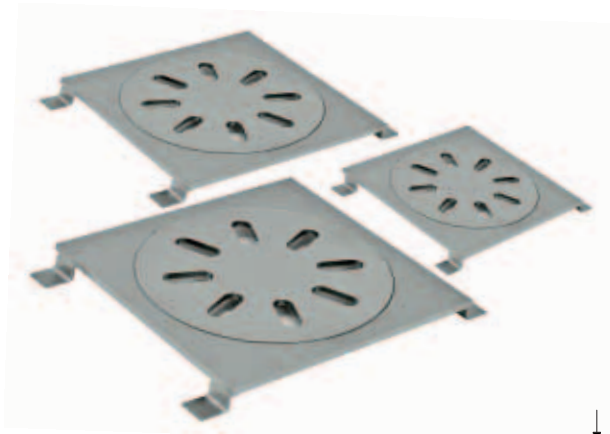


Features
Finish: **Sand-blast**

Item.	Main Measurements (mm)				
	ØA	B	ØC	D	S
ISP 10x10	100x100	20	80	130	4
ISP 12x12	125x125	20	100	155	4
ISP 15x15	150x150	20	120	180	4


ISP.3x3 INSPECTION GULLIES



Also available anti-skid version.

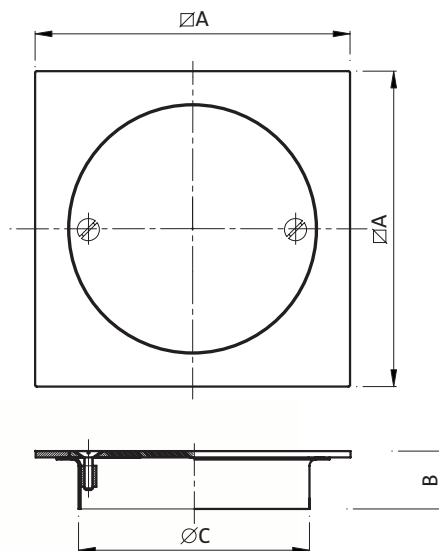

Features
Finish: **Sand-blast**.
Also available with surface anti-skid.
With screws, without seals.

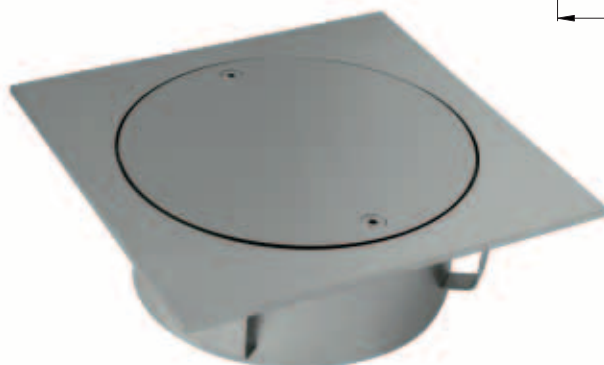

Item.	Main Measurements (mm)			Capacity (Kg)	
	ØA	B	ØC	Concentrated load	Distributed load
ISP 2x2	200	50	154	1000	5000
ISP 3x3	300	50	215	1000	5000
ISP 4x4	400	50	315	900	3500
ISP 5x5	500	50	425	800	3000
ISP 6x6	600	50	495	750	2800

INSPECTION FRAME WATER TIGHT

CT.400

INSPECTIONS FRAME WATER TIGHT

Features




Finish: Sand-blast

Suitable for flooring, the quality of concrete is extremely important.

Available with seal.



Also available anti-skid version.

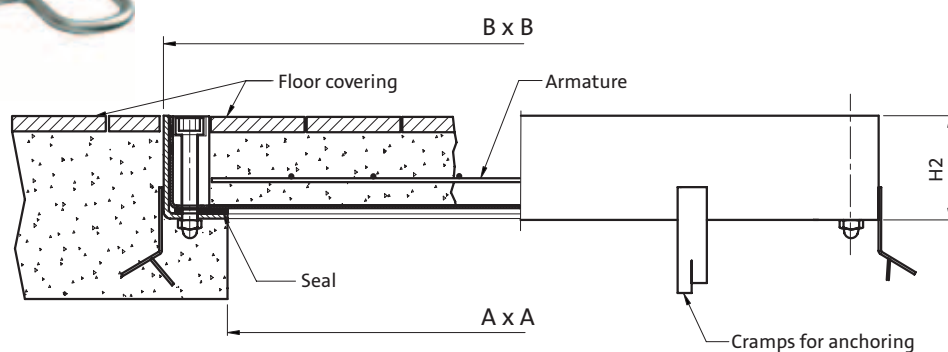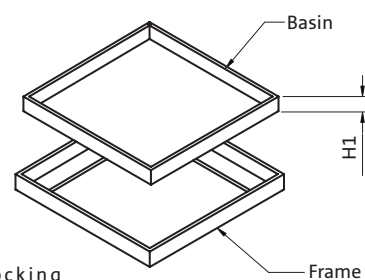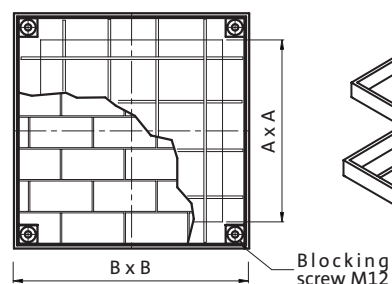

Application with GULLY 200x200

Item.	Main Measurements (mm)				Capacity (Kg)
	AxA	BxB	H1	H2	Concentrated load track of wheels 150x150
CT.300	300x300	400x400	72	80	Kg. 5400
CT.400	400x400	500x500	72	80	Kg. 3600
CT.500	500x500	600x600	72	80	Kg. 2400
CT.600	600x600	700x700	72	80	Kg. 1500
CT.700	700x700	800x800	72	80	Kg. 1200
CT.800	800x800	900x900	72	80	Kg. 900

GULLIES WITH FLANGE FOR INSULATION



Notes:

On all standard and lower models, with vertical or horizontal discharge.

On all unions it is possible have an upper flange with screws for securing the insulation.

GULLIES WITH PIPE UNION



Notes:

On all standard and lower models, with vertical discharge.

Also possible to have an upper flange with screws for securing the insulation.

GULLIES WITH FRAME



Notes:




On all models with plate surface, in standard or lower versions with vertical discharge.

CHANNELS FOR SWIMMING POOLS


PC.100

Channels designed specifically for swimming pools, changing rooms, shower rooms; the discharge of water takes place through a narrow slot of up to 8 mm. They are constructed in AISI 304, but especially also in AISI 316 for use in environments with high levels of chlorine. Their constructional form with perimeter wings makes it possible to secure the insulating material in the ideal way. The inspection gullies have a siphon and are equipped with a filter basket. The assembly of the various gullies and the channels is provided for by means of flanges with silicon seals that are secured with bolts to ensure that they remain water-tight. Even in this instance parameters such as length, height, position of the discharges, can be varied depending on individual requirements.

To facilitate the installation, the materials are provided with a drawing showing a system of numbering for installation of the pieces in the correct sequence.

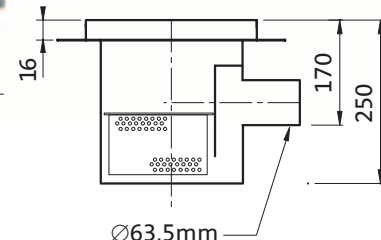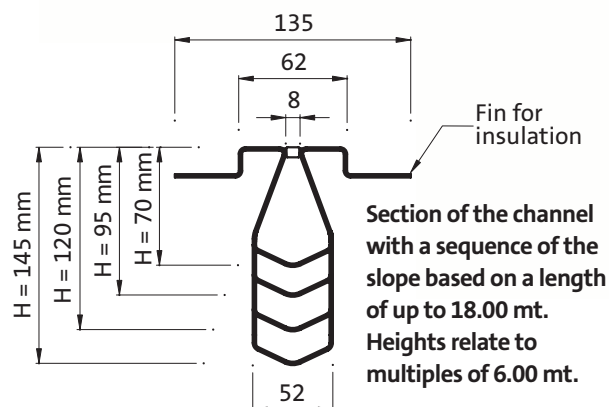

Gully cover version for flooring

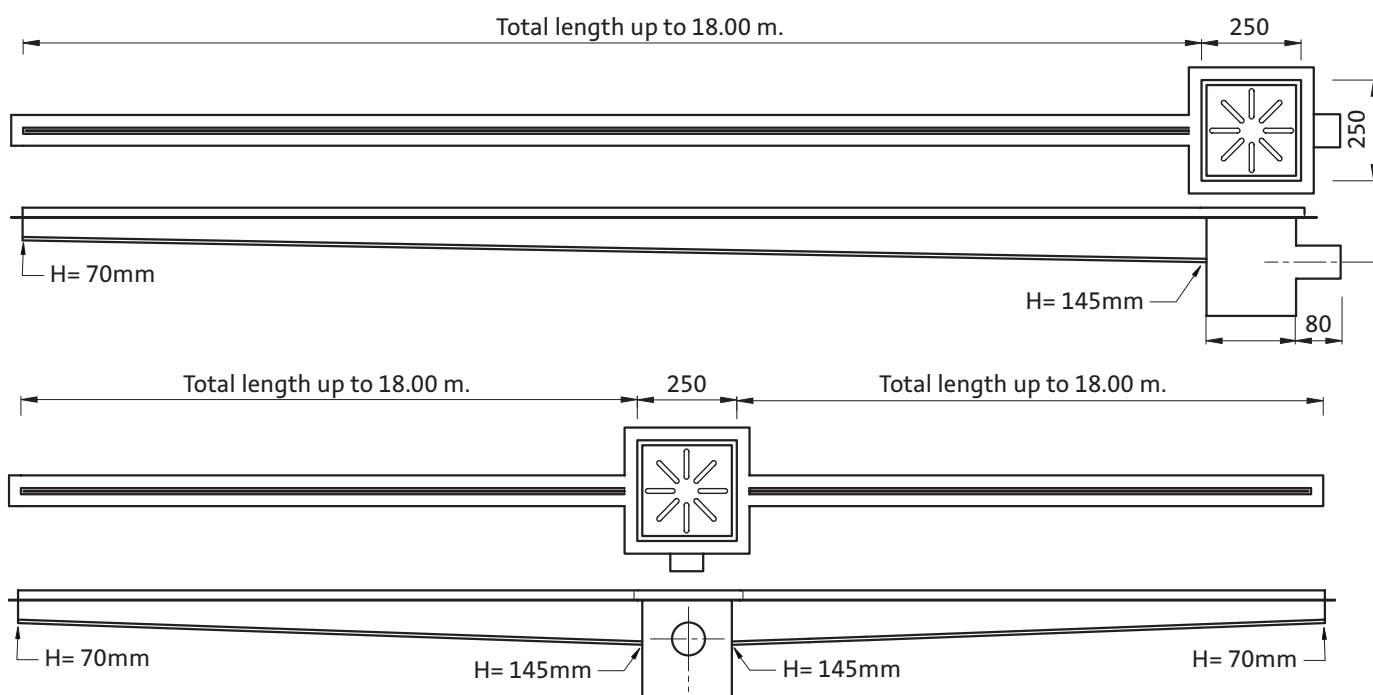

PC.001

The “Leoni” slot channels is the ideal solution for the drainage of industrial flooring of all types.

Manufactured entirely of AISI 304 stainless steel (or AISI 316 on request), combined with 300 x 300 mm collection gullies they are easily washed and inspected and the aspects of hygiene and cleanliness are provided for in compliance with Community regulations.

Protection from sewerage discharge is ensured by an anti-smell siphon and by a removable filter basket.


Their structure, thanks also to the special cramps for anchoring in concrete make the channel especially tough in situations with high levels of flow-rate.

The construction of these systems is carried out completely in accordance with the requirements of the customer with one of our support technicians; in fact every quotation will be provided with its associated drawing showing the principal technical characteristics. In the event that the supply is for large quantities the various modules can be supplied in lengths of 6.00 mt.

For small supplies, to optimise the transport operations, the various pieces can be assembled into maximum lengths of 4.00 mt.

The assembly of the various gullies and the channels is provided for by means of flanges with silicon seals that are secured with bolts to ensure that they remain water-tight.


To facilitate the installation, a drawing will be attached to the material showing a system of numbering for installation of the pieces in the correct sequence.

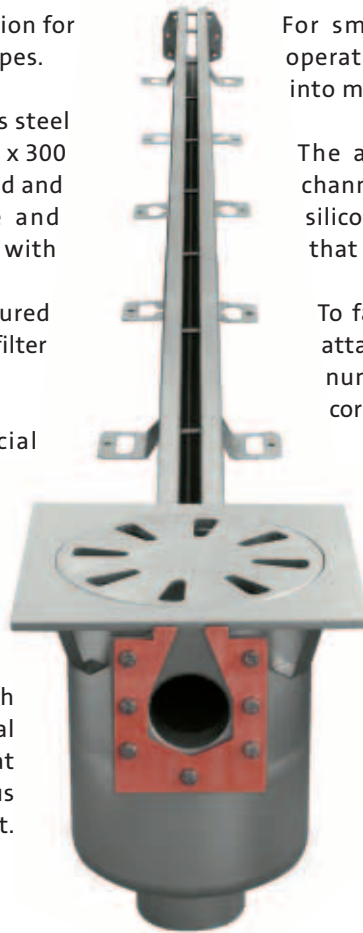

Main features	
Channel width	70mm
Channel slot	20mm
Thickness of material	2mm (3mm on request)
Drainage slope	0,4% (4mm per linear metre)
Minimum height	70mm
Maximum height	220mm (36 metres)
Max. transport length	6 mt.
Spacing rods	every 330mm
Cramps for anchoring	every 330mm
Flanges with screws	every 4/6 m.

NOTE:

On request all systems can be fitted with adjustable feet for positioning and height levels.

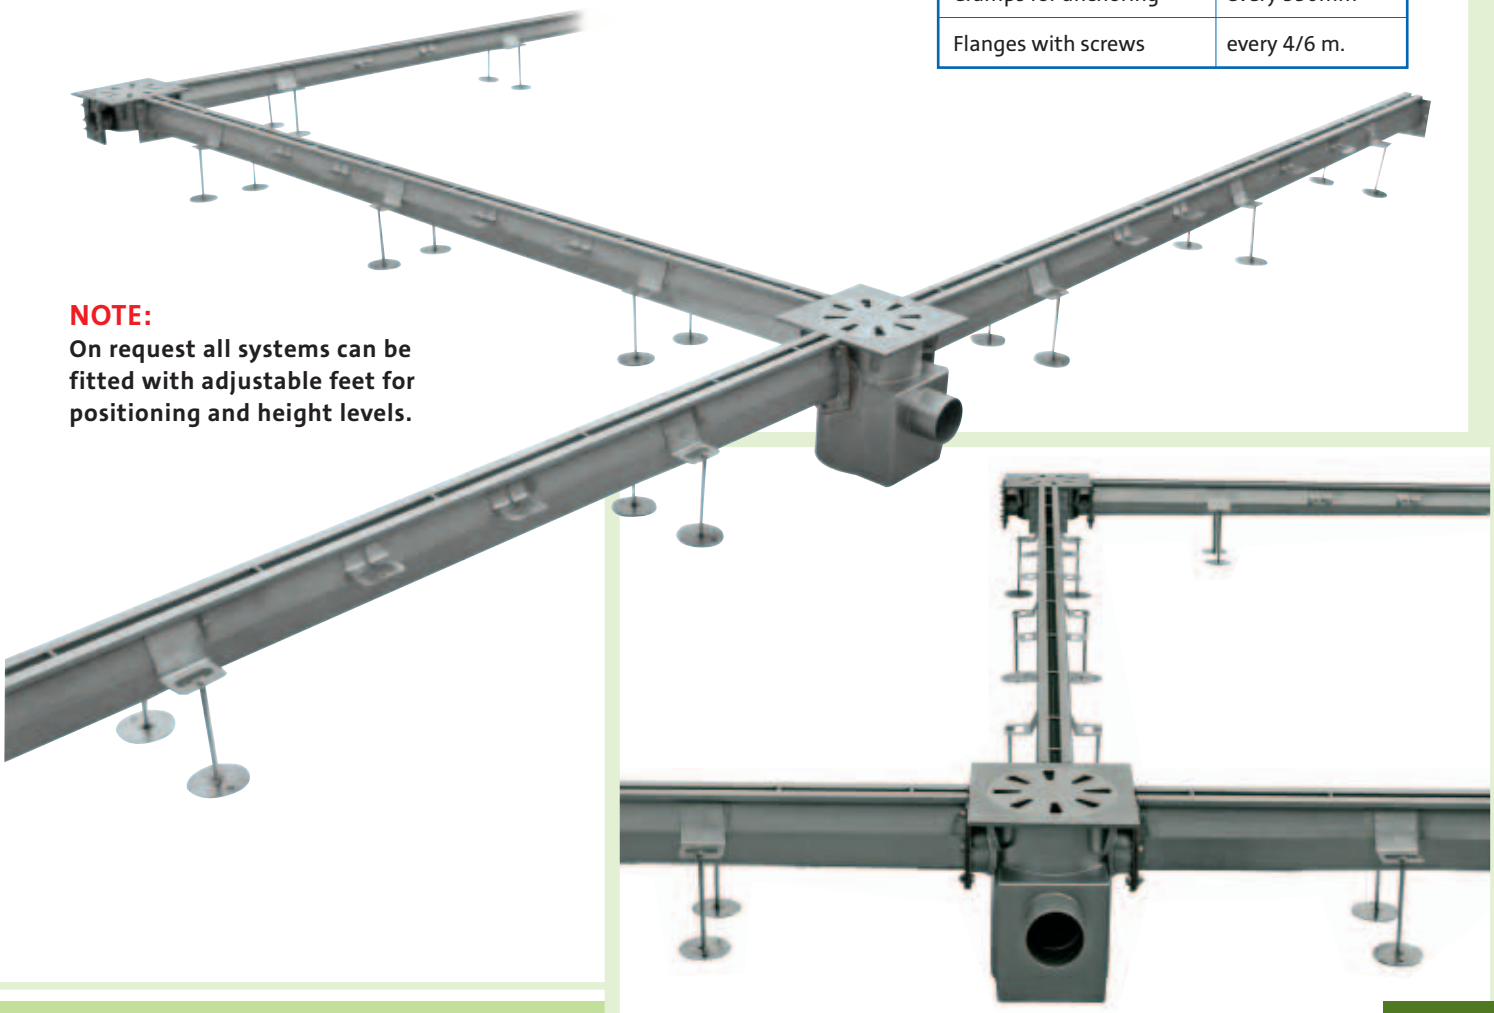

STAINLESS STEEL SLOT CHANNELS

PC.001



Longitudinal application of inspection 300x300 with perpendicular intersection.



Drain channels with outlet application.



Detail of gully double connection.



Application into the drain channels of inspection 300x300 weld in corner of 90°.


SLOT CHANNELS SYSTEMS WITH VERTICAL DISCHARGE





NOTE:

On request all systems can be fitted with adjustable feet for positioning and height levels.

PC.002V GULLY SINGLE CONNECTION WITH VERTICAL DISCHARGE

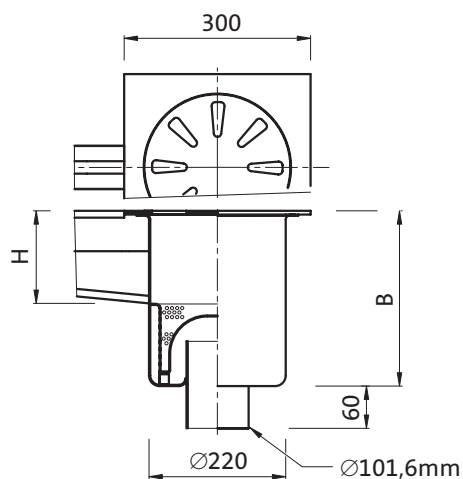

PC.003V GULLY DOUBLE CONNECTION WITH VERTICAL DISCHARGE

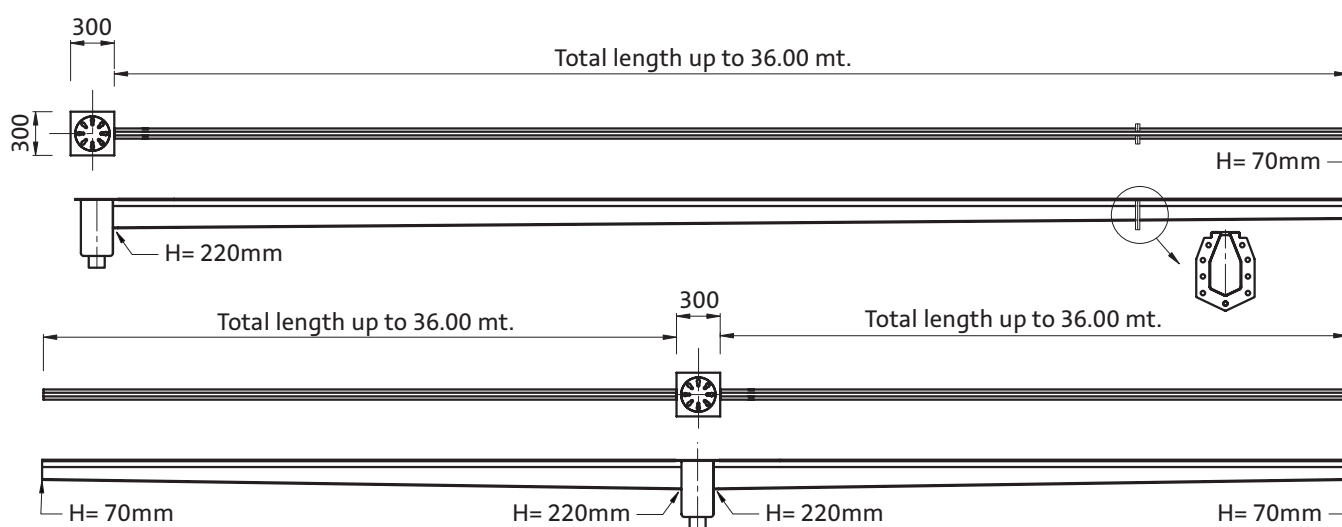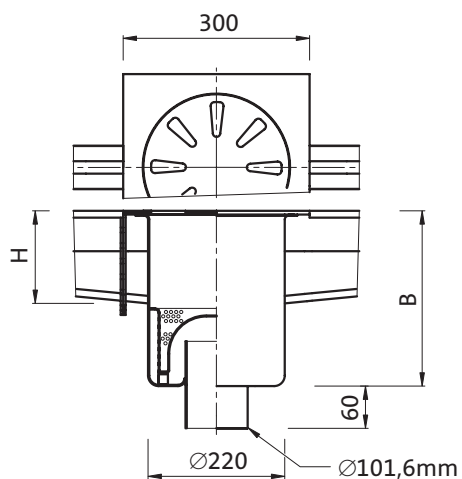


NOTE:

All systems are produced in accordance with the requirements of the customer, hence parameters such as length and position of the discharges are not binding.

Channel length	Channel height "H" on the gully	Size "B"
Up to 6.00 mt.	95mm	265mm
From 6 mt. to 12 mt.	120mm	290mm
From 12 mt. to 18 mt.	145mm	315mm
From 18 mt. to 24 mt.	170mm	340mm
From 24 mt. to 30 mt.	195mm	365mm
From 30 mt. to 36 mt.	220mm	390mm


SLOT CHANNEL SYSTEMS WITH HORIZONTAL DISCHARGE

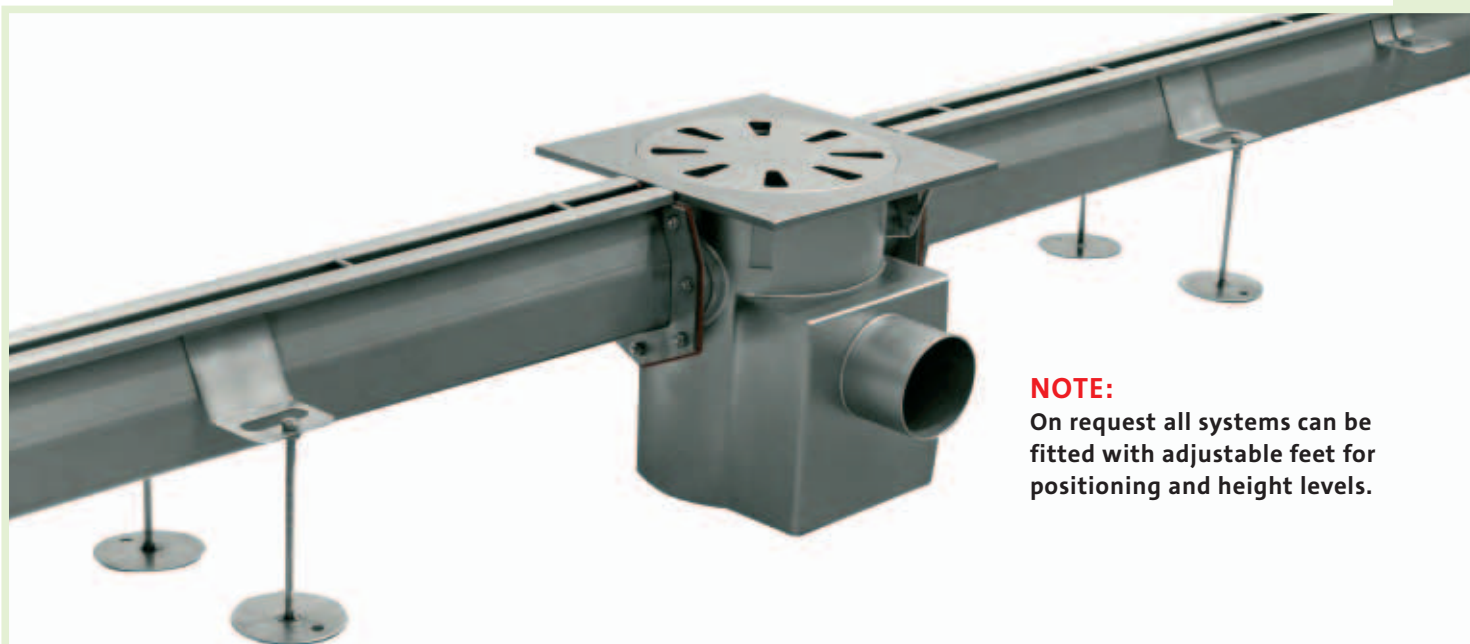



NOTE:

On request all systems can be fitted with adjustable feet for positioning and height levels.

PC.002L GULLY WITH SINGLE CONNECTION FOR CHANNEL, HORIZONTAL DISCHARGE.

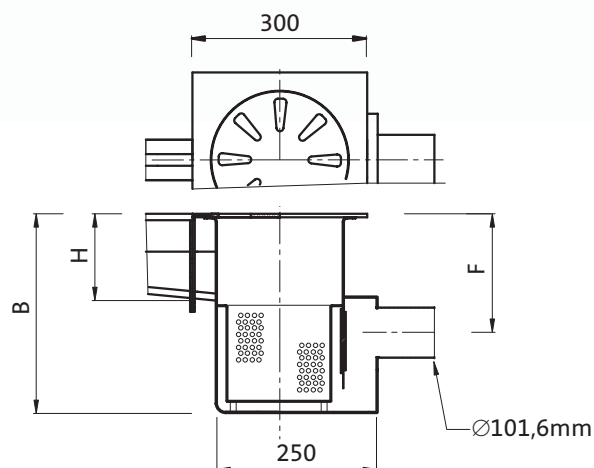

PC.003L GULLY WITH DOUBLE CONNECTION FOR CHANNEL, HORIZONTAL DISCHARGE.

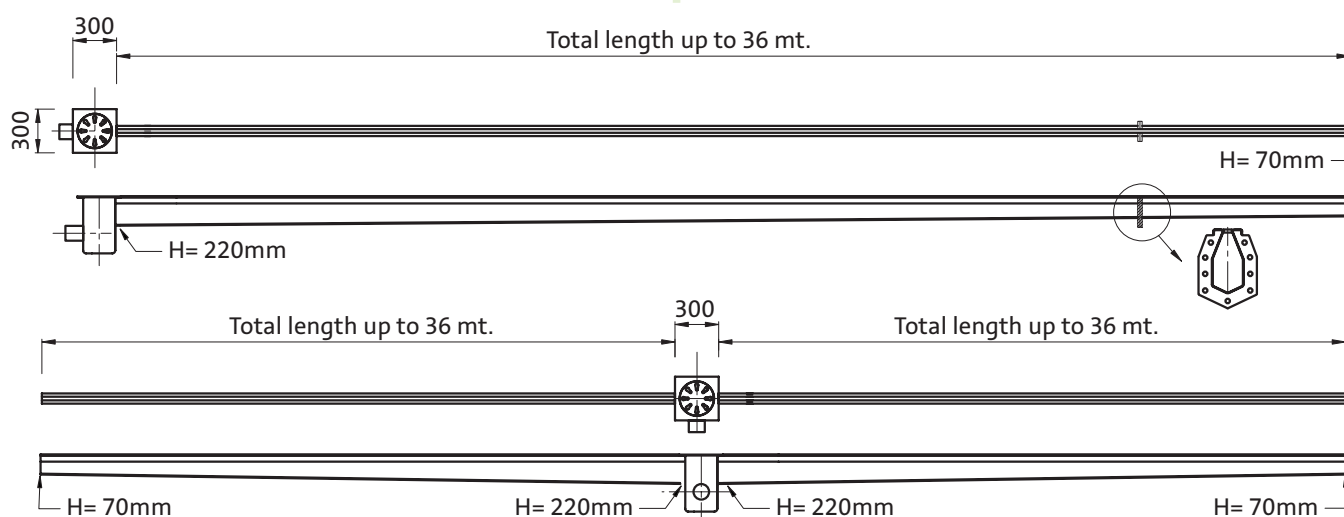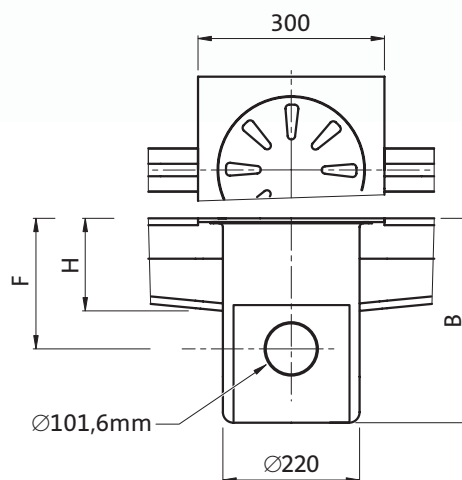

NOTE:


All systems are produced in accordance with the requirements of the customer, hence parameters such as length and position of the discharges are not binding.

Channel length	Channel height "H" on the gully	Size "B"	Middle discharge depth "F"
Up to 6.00 mt.	95mm	280mm	130mm
From 6 mt. to 12 mt.	120mm	305mm	155mm
From 12 mt. to 18 mt.	145mm	330mm	180mm
From 18 mt. to 24 mt.	170mm	355mm	205mm
From 24 mt. to 30 mt.	195mm	380mm	230mm
From 30 mt. to 36 mt.	220mm	405mm	255mm


SLOT CHANNELS SYSTEMS WITH LOWER GULLIES

Especially for situations with problems of height on the footings it is possible to opt for lower gullies both with vertical or horizontal discharges, sizeable according to the length of the channel.

PC.002 V
LOWER

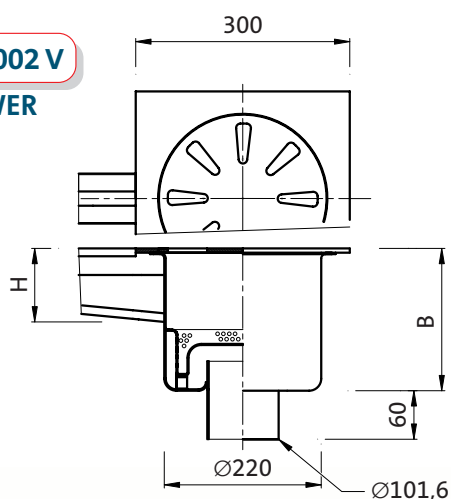

PC.002 L
LOWER

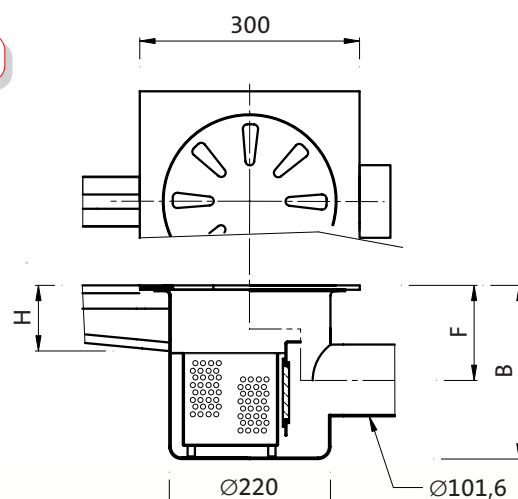

NOTE:
Example of gullies
with the least depth
achievable for
channels with
lengths of up to
6.00 mt and 12.00 mt.



NOTE:
If necessary is possible to do more low.

Channel length	Channel height "H" on gully	Size "B"
Up to 6.00 mt.	95mm	210mm
From 6 mt. to 12 mt.	120mm	235mm

Channel length	Channel height "H" on gully	Size "B"	Middle discharge depth "F"
Up to 6.00 mt.	95mm	230mm	100mm
From 6 mt. to 12 mt.	120mm	255mm	125mm

SPECIAL APPLICATIONS



On request the pipes
below the channel with
its associated connections
and mounted using
flanges and seals can be
made with stainless steel.

CHANNELS SYSTEM WITH GRATING COVERS WIDHT 150 mm.

PC.023


They represent an excellent solution where a channel with a high drainage capacity is called for together with the functionality of a grating cover enabling them to be inspected throughout.

Combined with 300 x 300 mm collection gullies, the same as the PC.001 slot channel systems, they are easily washed and inspected and the aspects of hygiene and cleanliness are provided for in compliance with Community regulations. Protection from sewerage discharge is ensured by an anti-smell siphon and by a removable filter basket.


Constructed in AISI 304 stainless steel (or AISI 316 on request) parameters such as length, height, position of the discharges, can be varied depending on individual requirements.

For small supplies, to optimise the transport operations, the various pieces can be assembled into maximum lengths of 4.00 mt.

To facilitate the installation, a drawing will be attached to the material showing a system of numbering for installation of the pieces in the correct sequence.

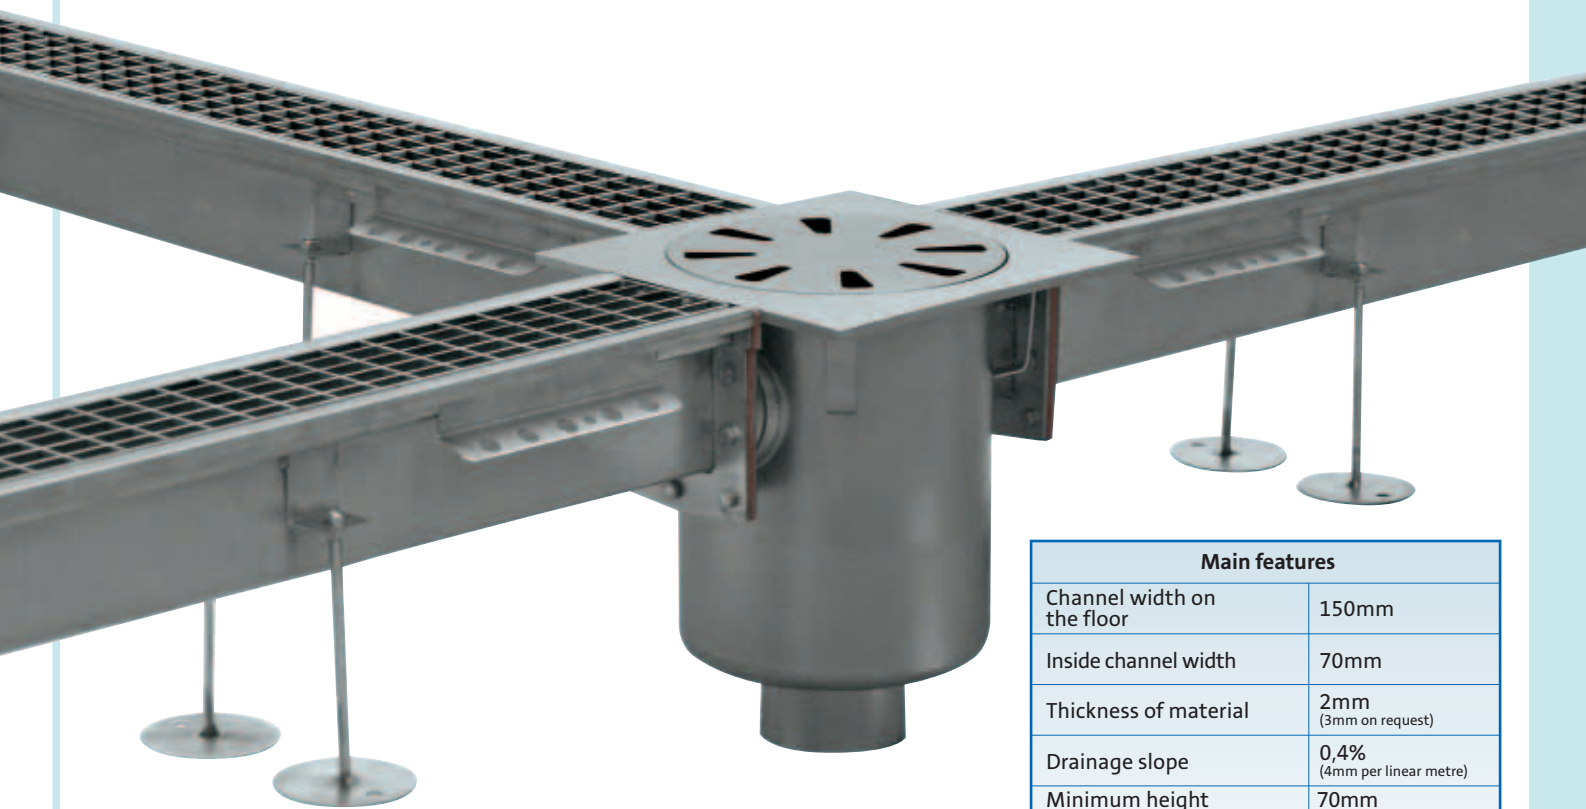


Main features	
Channel width on the floor	150mm
Inside channel width	70mm
Thickness of material	2mm (3mm on request)
Drainage slope	0,4% (4mm per linear metre)
Minimum height Maximum height	70mm 195mm (30 metres)
Max. transport length	4/6 mt.
Cramps for anchoring	every 330mm
Flanges with screws	every 4/6 m.

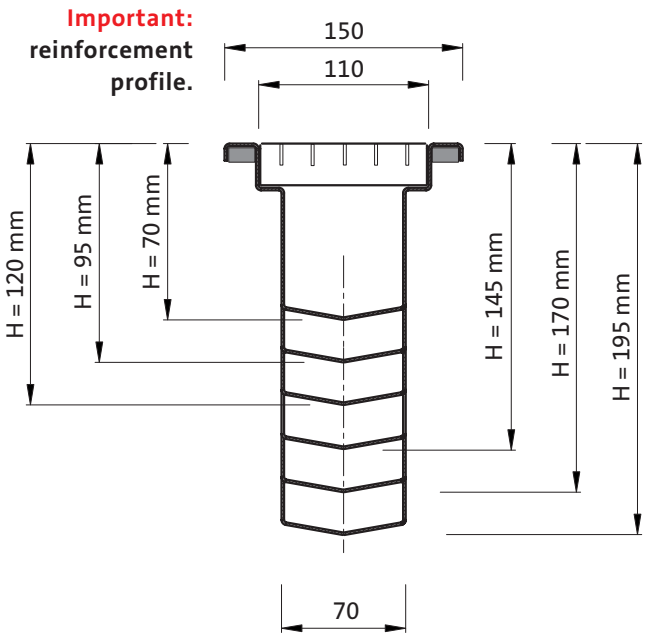

Section of the channel with a sequence of the variation of the slope up to 30.00 mt; the heights are with reference to module lengths of 6.00 mt.

NOTE: Work is regularly carried out with totally personalised lengths taking no account of standard modules.


CHANNELS SYSTEM WITH GRATING COVERS WIDHT 150 mm. HORIZONTAL DISCHARGE

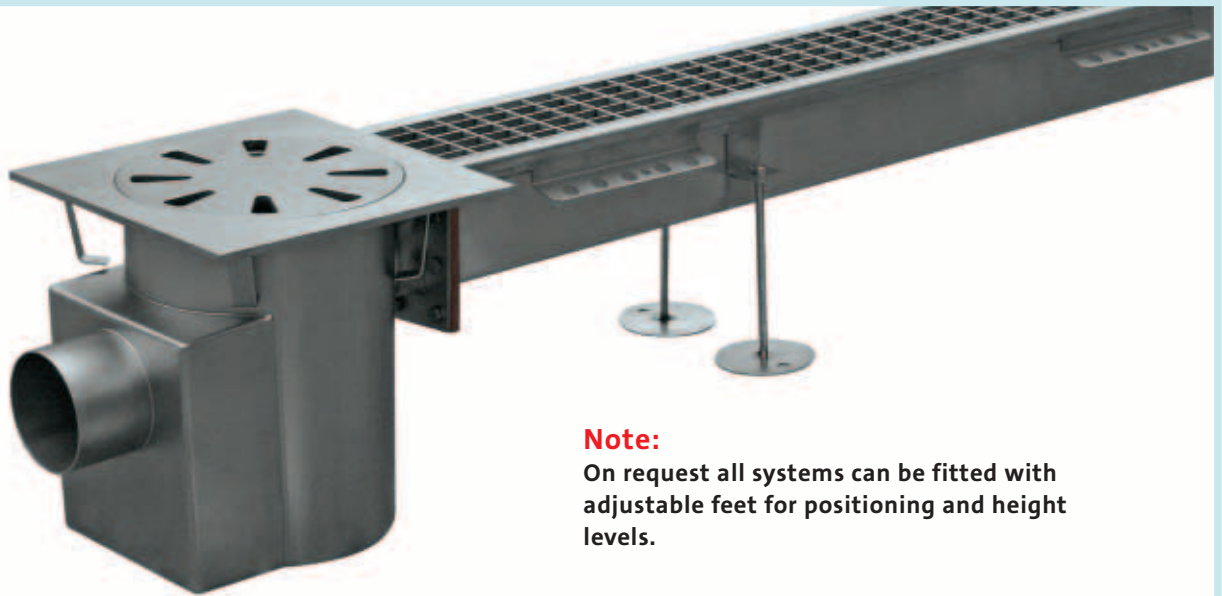



Note:

On request all systems can be fitted with adjustable feet for positioning and height levels.

PC.002GL GULLY WITH SINGLE CONNECTION FOR CHANNEL, HORIZONTAL DISCHARGE.

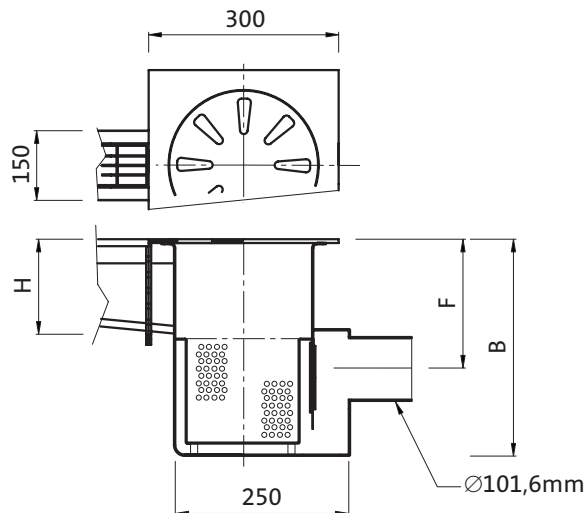

PC.003GL GULLY WITH DOUBLE CONNECTION FOR CHANNEL, HORIZONTAL DISCHARGE.

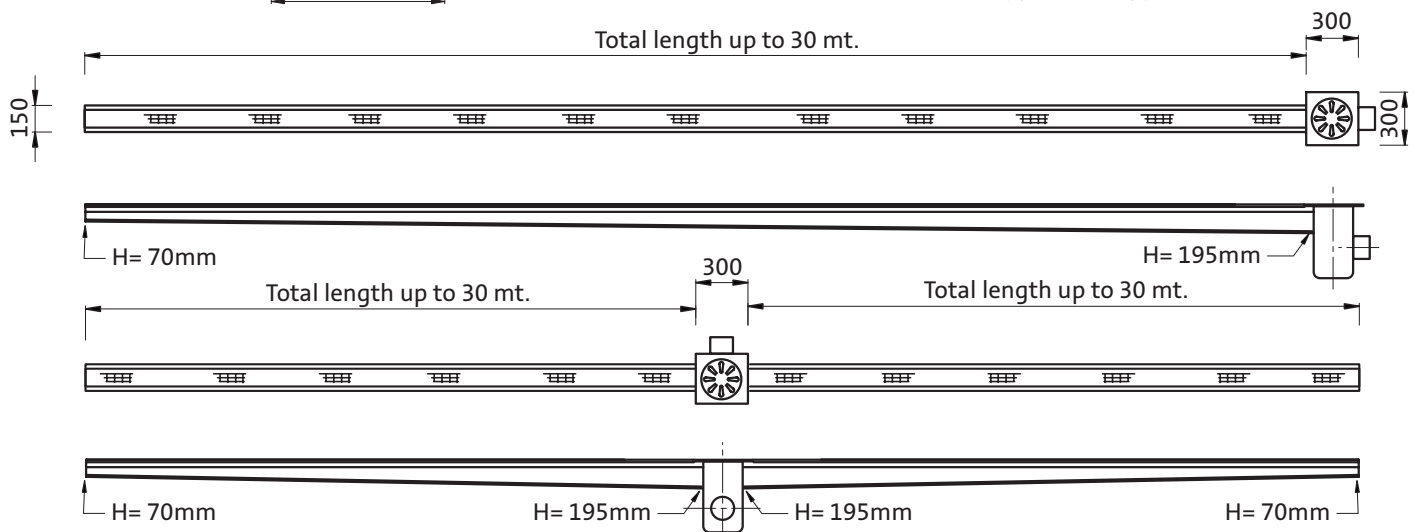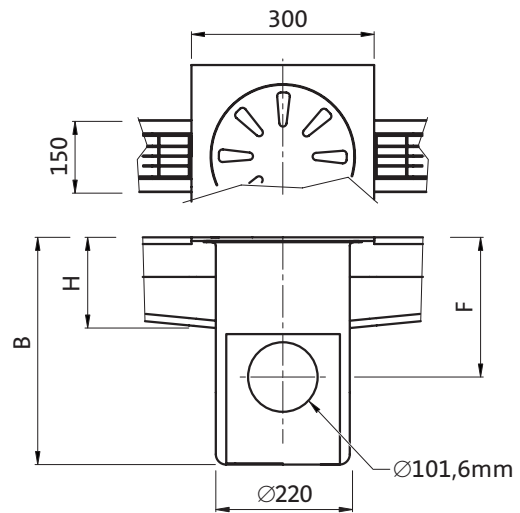


Note:

All systems are produced in accordance with the requirements of the customer, hence parameters such as length and position of the discharges are not binding.

Channel length	Channel height "H" on gully	Size "B"	Middle discharge depth "F"
Up to 6 mt.	95mm	280mm	130mm
From 6 mt. to 12 mt.	120mm	305mm	155mm
From 12 mt. to 18 mt.	145mm	330mm	180mm
From 18 mt. to 24 mt.	170mm	355mm	205mm
From 24 mt. to 30 mt.	195mm	380mm	230mm


CHANNELS SYSTEM WITH GRATING COVERS WIDTH 150 mm. VERTICAL DISCHARGE

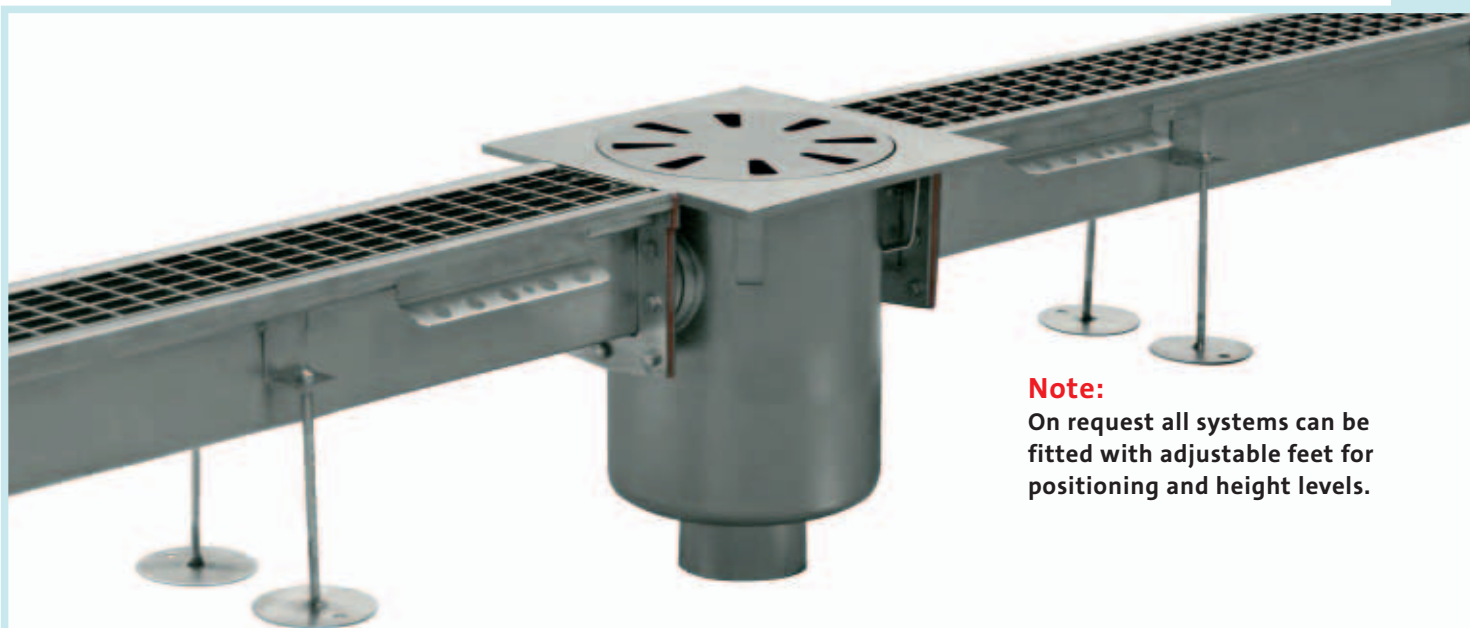



Note:

On request all systems can be fitted with adjustable feet for positioning and height levels.

PC.002GV GULLY WITH SINGLE CONNECTION FOR CHANNEL, VERTICAL DISCHARGE.

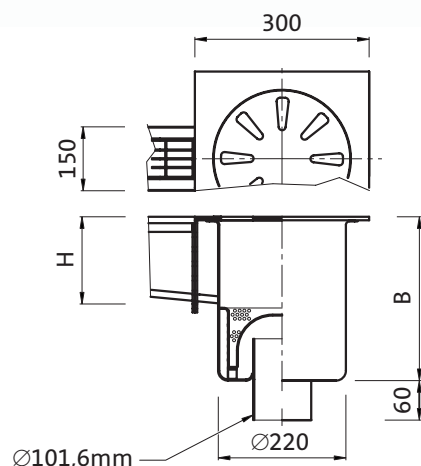

PC.003GV GULLY WITH DOUBLE CONNECTION FOR CHANNEL, VERTICAL DISCHARGE.

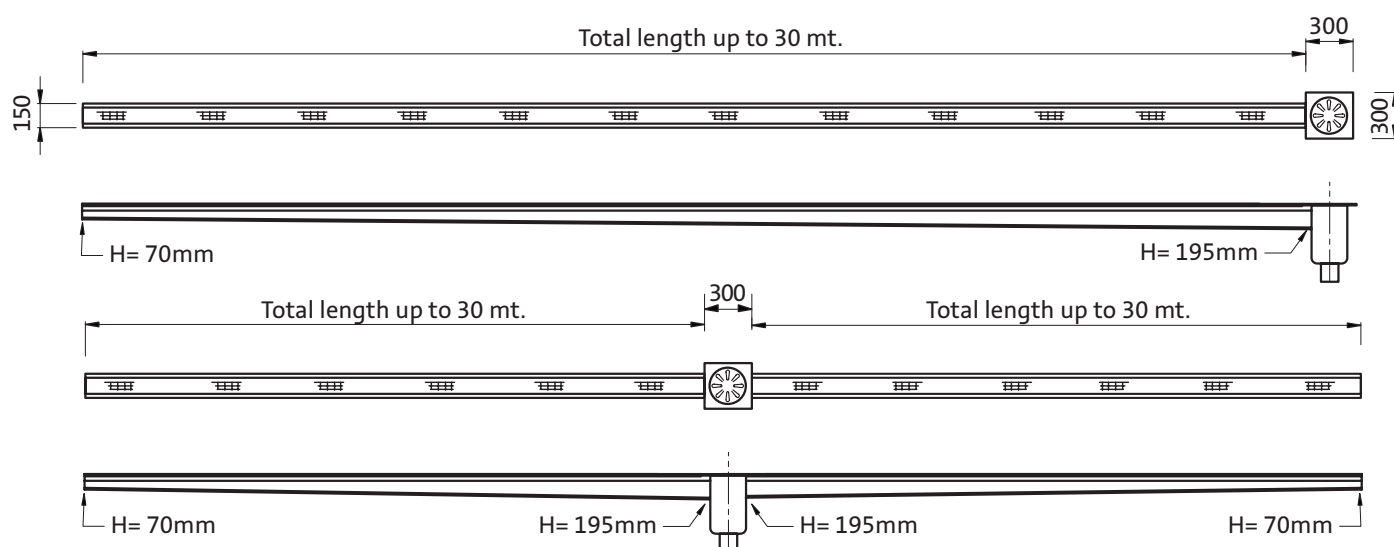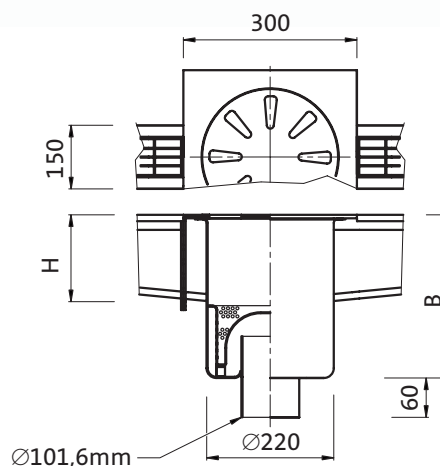

Note:

All systems are produced in accordance with the requirements of the customer, hence parameters such as length and position of the discharges are not binding.



Channel height	Channel height "H" on gully	Size "B"
Up to 6 mt.	95mm	265mm
From 6 mt. to 12 mt.	120mm	290mm
From 12 mt. to 18 mt.	145mm	315mm
From 18 mt. to 24 mt.	170mm	340mm
From 24 mt. to 30 mt.	195mm	365mm

CHANNELS WITH GRATING COVERS

The “Leoni” channels with grating covers are particularly recommended in instances where there is a need for draining large quantities of water relatively quickly; in fact it is possible to combine these items with very large size discharges.

Constructed in AISI 304 stainless steel (or AISI 316 on request) parameters such as length, height, position of the discharges and the flow-rate of the grating covers can be varied depending on individual requirements.

The totally inspectable discharges, equipped with a siphon and a filter basket, are perfectly integrated within the channel itself.

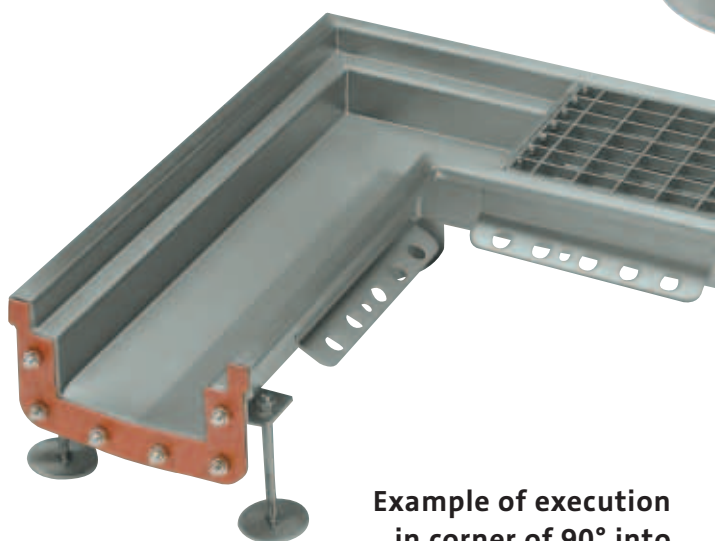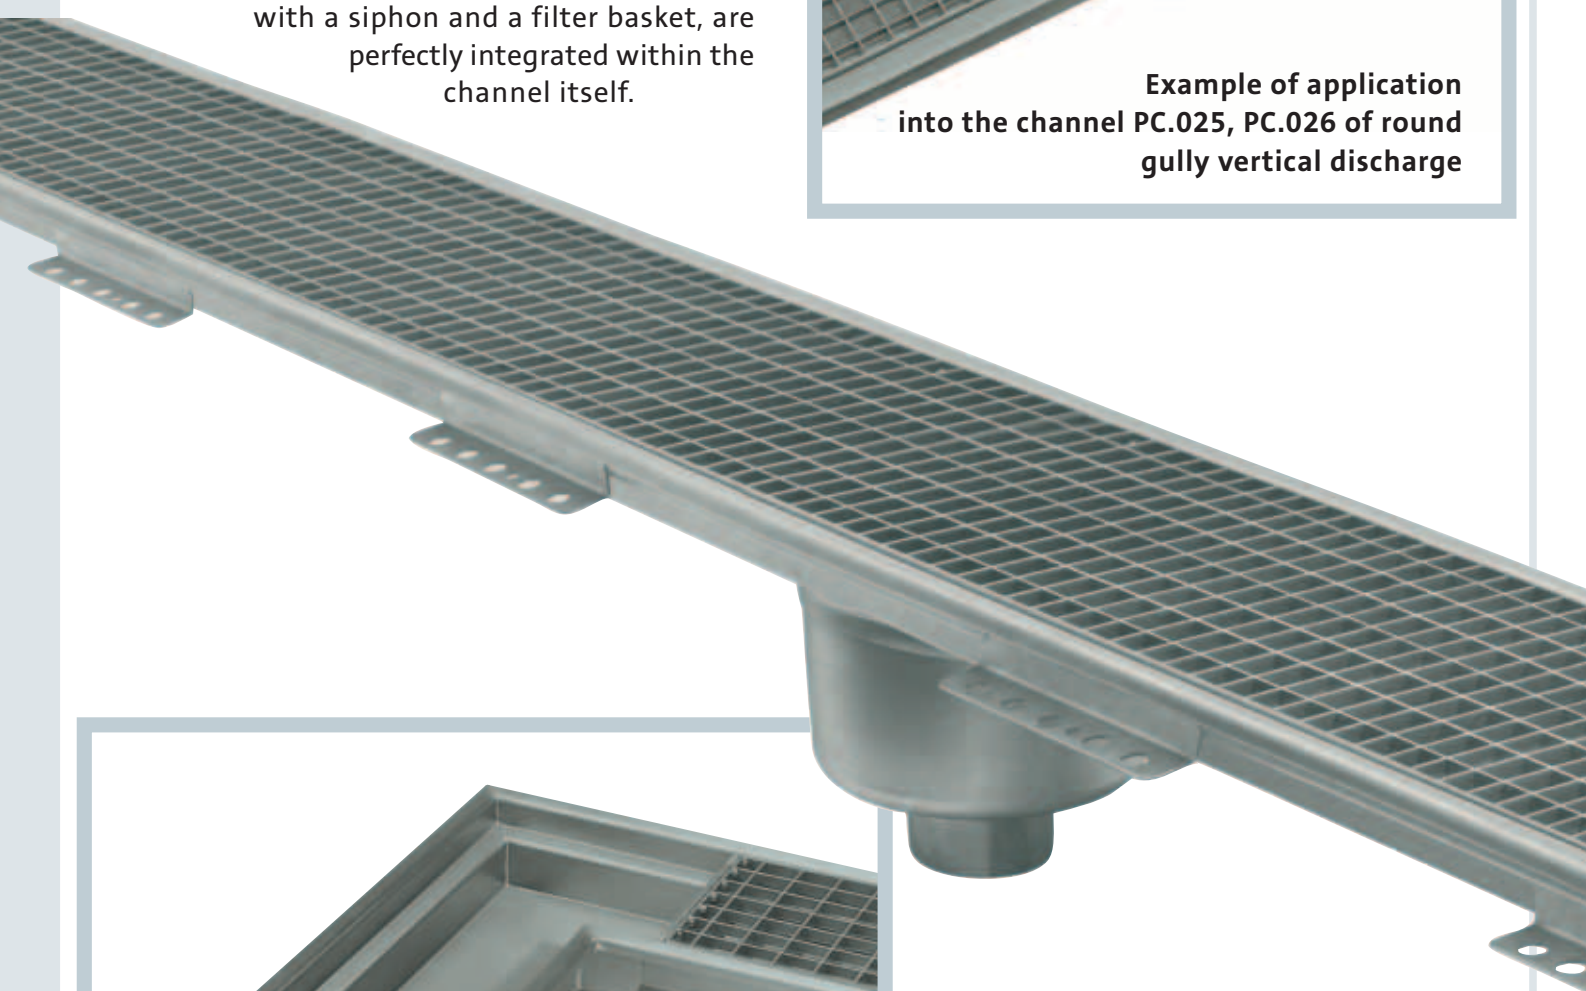

Example of execution
in corner of 90° into
channel PC.024

In the event that the supply is for large quantities the various modules can be supplied in lengths of 6.00 mt.


The assembly of the various gullies and the channels is provided for by means of flanges with silicon seals that are secured with bolts to ensure that they remain water-tight.

For small supplies, to optimise the transport operations, the various pieces can be assembled into maximum lengths of 4.00 mt.

To facilitate the installation, a drawing will be attached to the material showing a system of numbering for installation of the pieces in the correct sequence.



Example of application into the channel PC.024, PC.028, PC.026, PC.025 of square gully horizontal outlet.

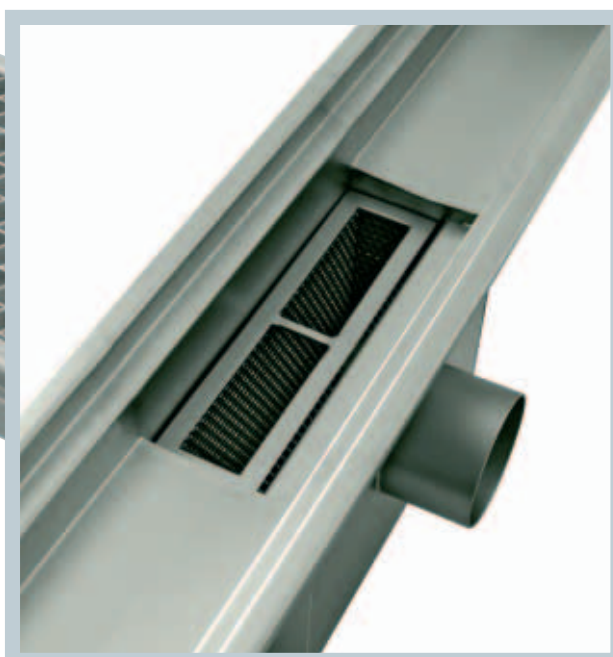



CHANNELS WITH GRATING COVERS

PC.024 HORIZONTAL DISCHARGE

PC.028


PC.025

PC.026

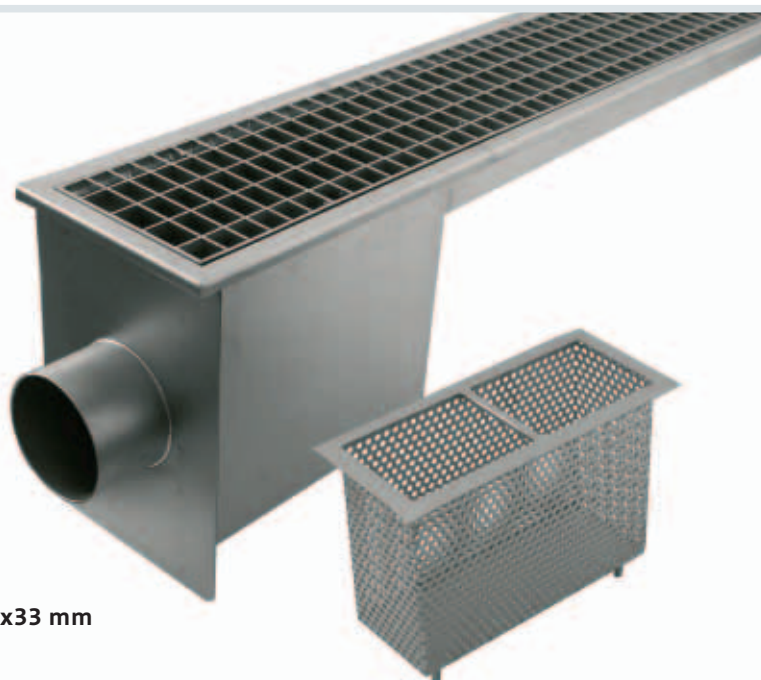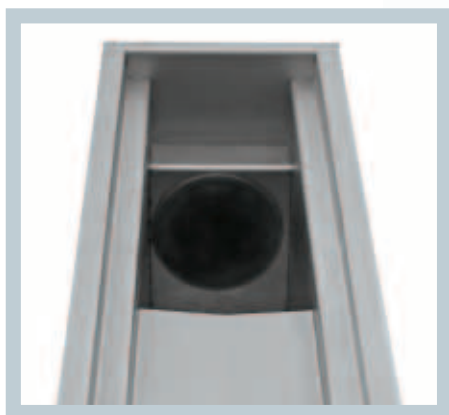

Main Features

Thickness channels:.....2 mm (3 mm on request)
 Standard grates:.....Height H=25 mm, mesh 22x33 mm
 Integrated slope:.....8 mm per running meter
 Flanges with screws:.....every 4/6 meter
 Max transport length:.....4/6 meter

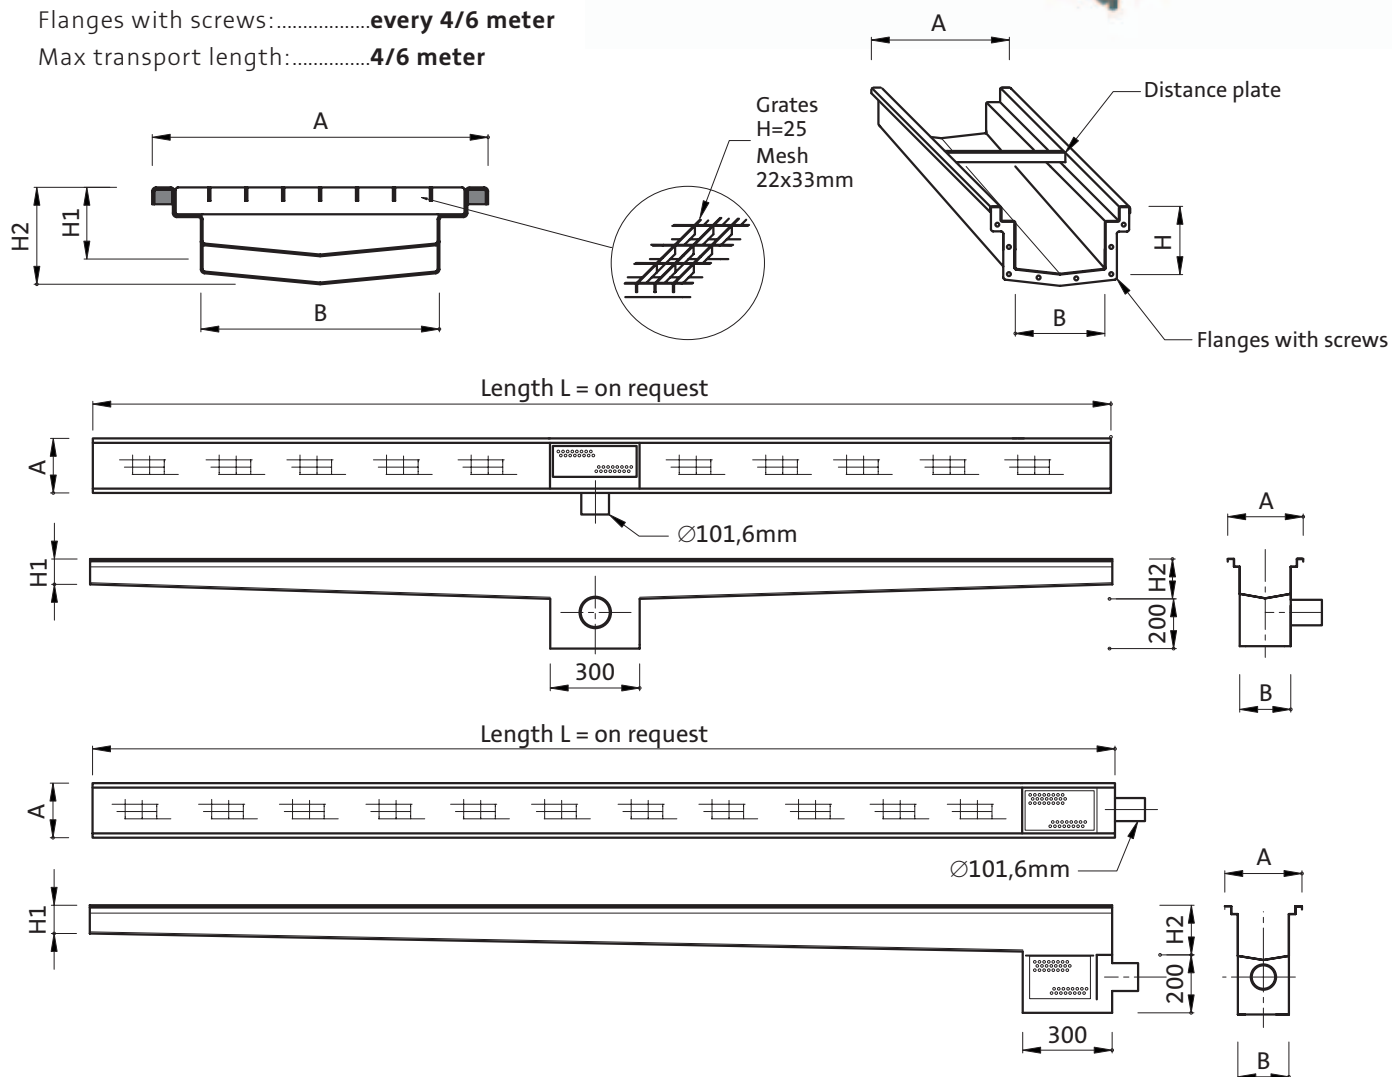

Note:

All systems are produced in accordance with the requirements of the customer, hence parameters such as length and position of the discharges are not binding.



Main measurements					
Item	Size "A"	Size "B"	Height "H1"	Height "H2"	Length "L"
PC.024	200mm	120mm	60mm	H1 + 8mm/MT. Per running meter	On request
PC.028	250mm	170mm	60mm		On request
PC.025	300mm	220mm	60mm		On request
PC.026	400mm	320mm	60mm		On request

PC.024 VERTICAL DISCHARGE

PC.028

Main Features

Thickness channels:.....**2 mm (3 mm on request)**
 Standard grates:.....**Height H=25 mm, mesh 22x33 mm**
 Integrated slope:.....**8 mm per running meter**
 Flanges with screws:.....**every 4/6 meter**
 Max transport length:.....**4/6 meter**

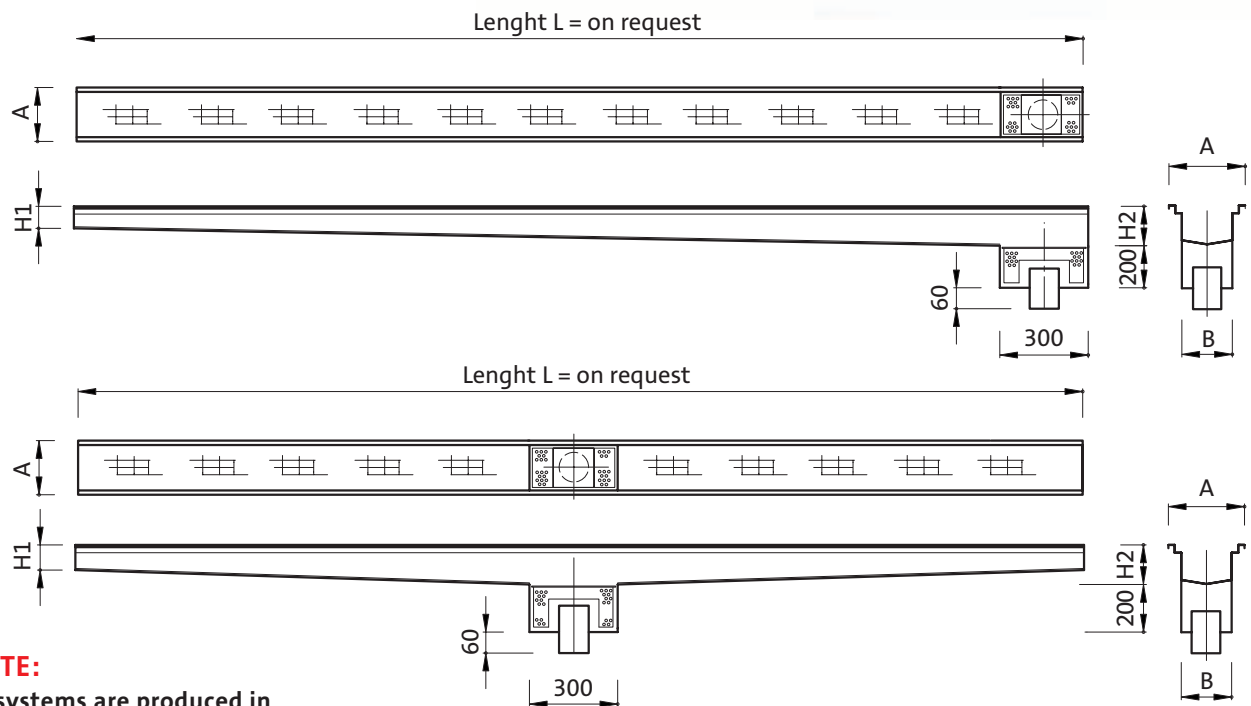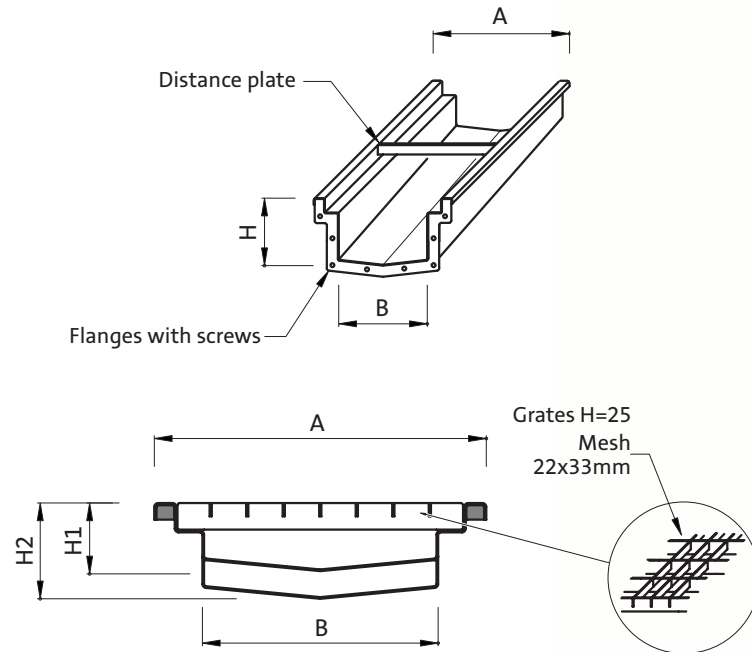

NOTE:



All systems are produced in accordance with the requirements of the customer, hence parameters such as length and position of the discharges are not binding.

Main measurements					
Item	Size "A"	Size "B"	Height "H1"	Height "H2"	Lenght "L"
PC.024	200mm	120mm	60mm	H1 + 8mm/MT. Per running meter	on request
PC.028	250mm	170mm	60mm		on request

CHANNELS WITH GRATING COVERS



PC.025 VERTICAL DISCHARGE

PC.026

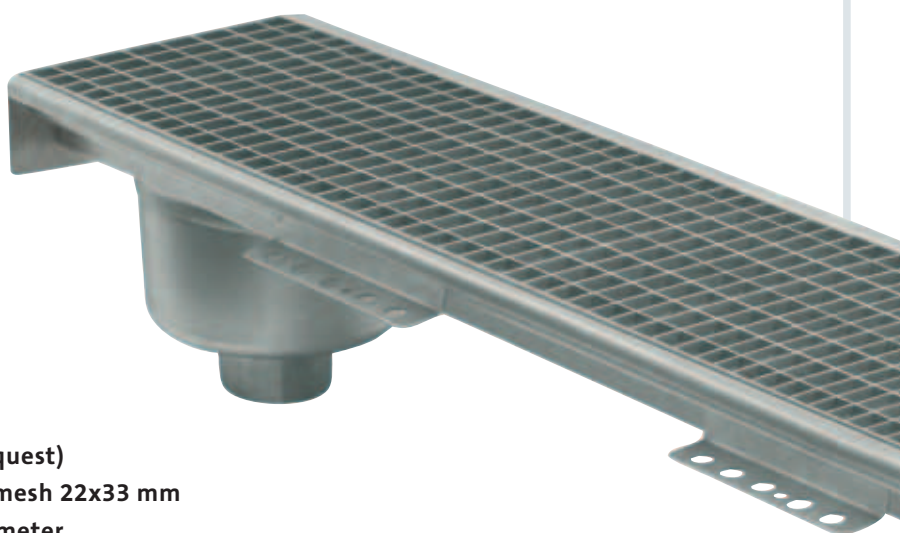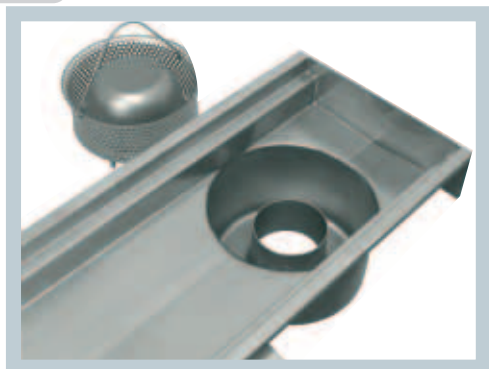

Main Features


Thickness channels:.....**2 mm (3 mm on request)**
 Standard grates:.....**Height H=25 mm, mesh 22x33 mm**
 Integrated slope:.....**8 mm per running meter**
 Flanges with screws:.....**every 4/6 meter**
 Max transport length:.....**4/6 meter**

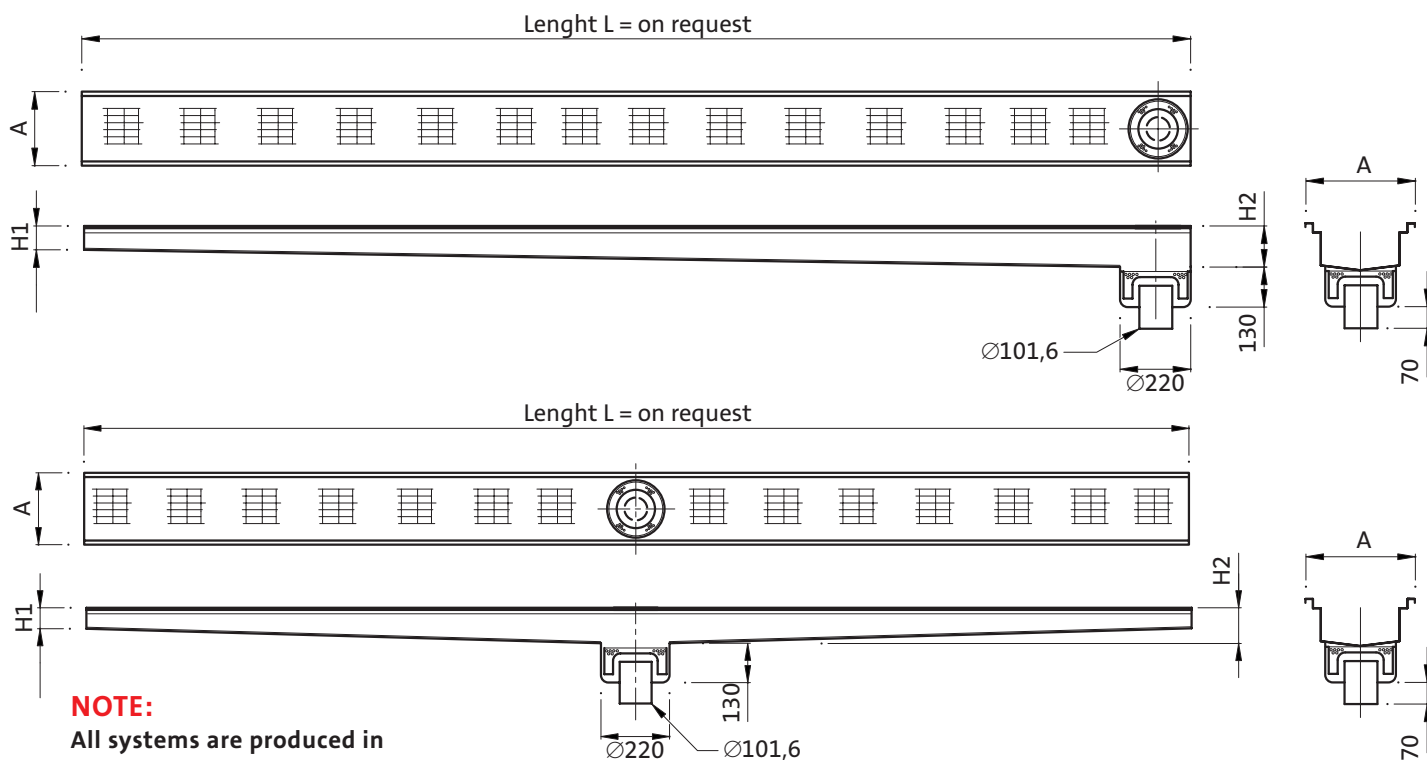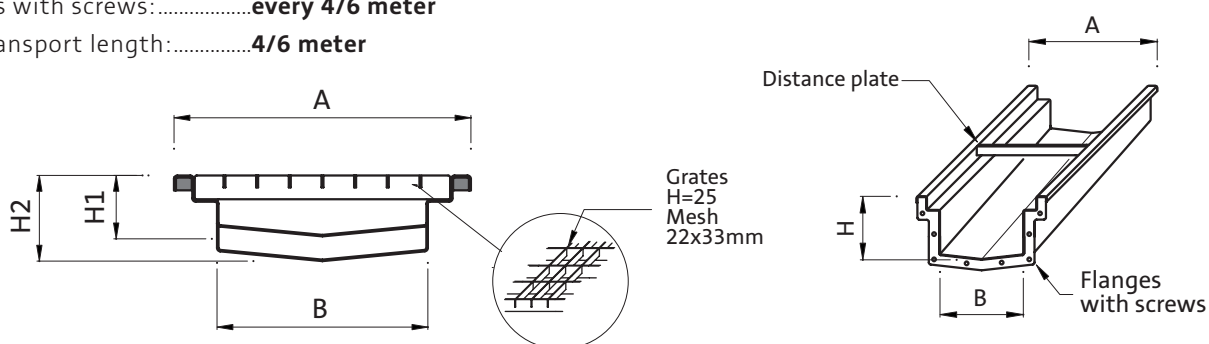

NOTE:

All systems are produced in accordance with the requirements of the customer, hence parameters such as length and position of the discharges are not binding.

Main measurements					
Item	Size "A"	Size "B"	Height "H1"	Height "H2"	Lenght "L"
PC.025	300mm	220mm	60mm	H1 + 8mm/MT. Per running meter	on request
PC.026	400mm	320mm	60mm		on request

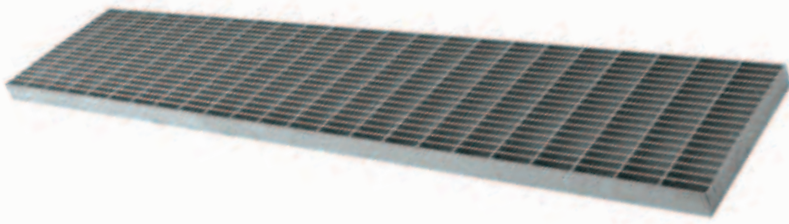


Heel-proof version grating panel

NOTE: Medium suitability for vehicles for all models.




Panel in textured heavy duty sheet metal with slots and reinforcements in heel-proof plate

NOTE: Good suitability for vehicles for all models.

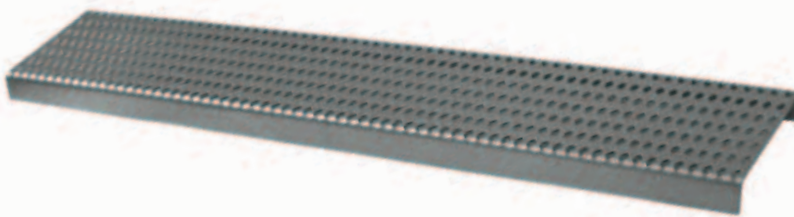

Panel in perforated sheet metal normally used with PC 023

NOTE: Not suitable for vehicles

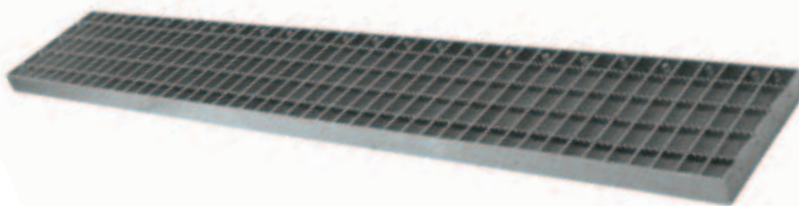

Grating panel with anti-slip grooves

NOTE: For all models



Slotted panel in heavy duty sheet steel particularly for PC 023 - PC 024



Flat bar panel

NOTE: Excellent suitability for vehicles for all models




Heavy duty plate panel + square section bar reinforcements. Particularly for PC 023 - PC 024. Excellent suitability for vehicles

BASIS WITH GRATING COVERS




VGR.30100 SV

In AISI 304 (or AISI 316 on request) and made in such a way as to limit the height occupied as much as possible, the completely inspectable discharges, equipped with siphons and filter baskets are perfectly integrated within the channel itself; obviously it is possible to have different sizes from those indicated in the table.

Made especially for the restaurant sector and hence used particularly in kitchens, hotels or large scale distribution meat and fish packing rooms. Being of large size, they allow large quantities of water to be drained, above all, preventing its dispersal over the floor.

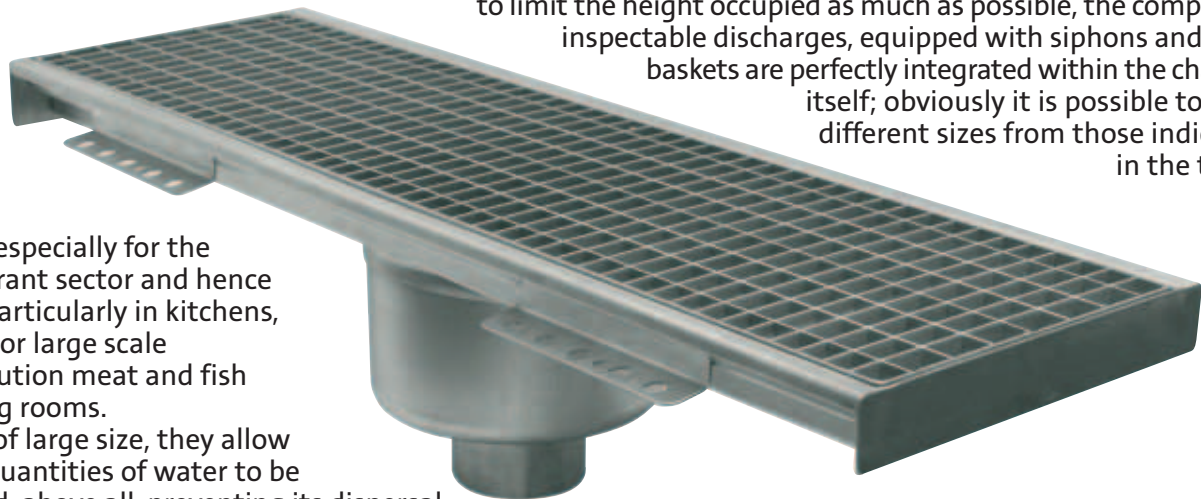

VERTICAL DISCHARGE

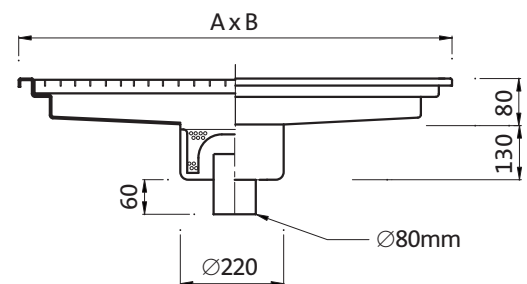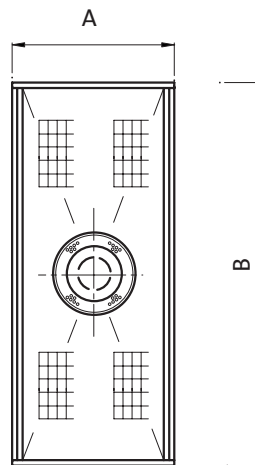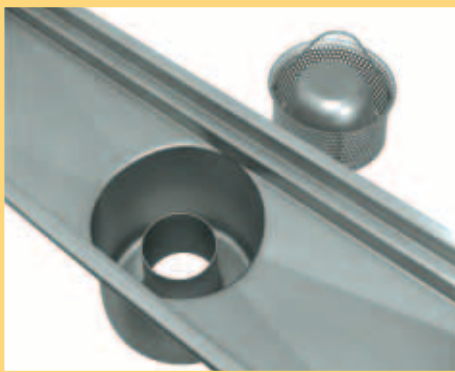

NOTE:




Standard grating covers

Height H=25mm

Mesh 22x33mm.

Also with discharge Ø50 - Ø63,5 - Ø76mm

HORIZONTAL DISCHARGE

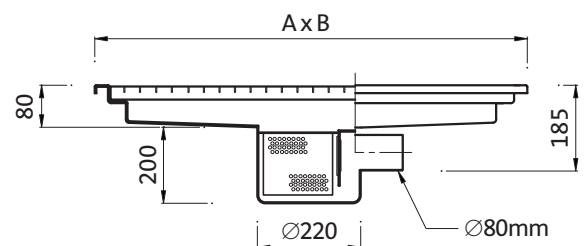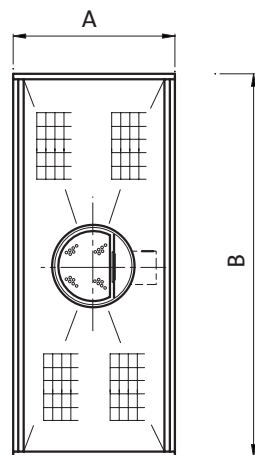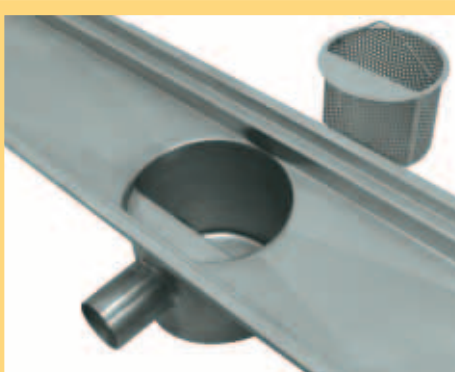

NOTE:

When ordering, after the code

specify the extension

SL=horizontal discharge

SV=vertical discharge

e.g.: VGR.30100 SL, VGR. 30100 SV.

Item	Size. "A" x "B"
VGR.3050	300x500mm
VGR.30100	300x1000mm
VGR.30150	300x1500mm
VGR.30200	300x2000mm
VGR.30300	300x3000mm

Item	Size. "A" x "B"
VGR.4040	400x400mm
VGR.40100	400x1000mm
VGR.40150	400x1500mm
VGR.40200	400x2000mm
VGR.40300	400x3000mm

Item	Size. "A" x "B"
VGR.5050	500x500mm
VGR.50100	500x1000mm
VGR.50150	500x1500mm
VGR.50200	500x2000mm
VGR.50300	500x3000mm

ANGLE FRAME WITH GRATING COVERS



Used in situations in which there is a need for a drainage channel with a grating panel surface resting on an angular frame, with inside channel width usually in concrete.

Constructed in AISI 304, they are used particularly in exterior situations such as courtyards and forecourts.

The grating panels each with a length of 1.00 mt are sized for different load-bearing characteristics, either pedestrian or vehicular.

The modular elements of the frame are made with a maximum length of 4.00 mt.

It is possible to obtain the different standard configurations depicted in the table below.

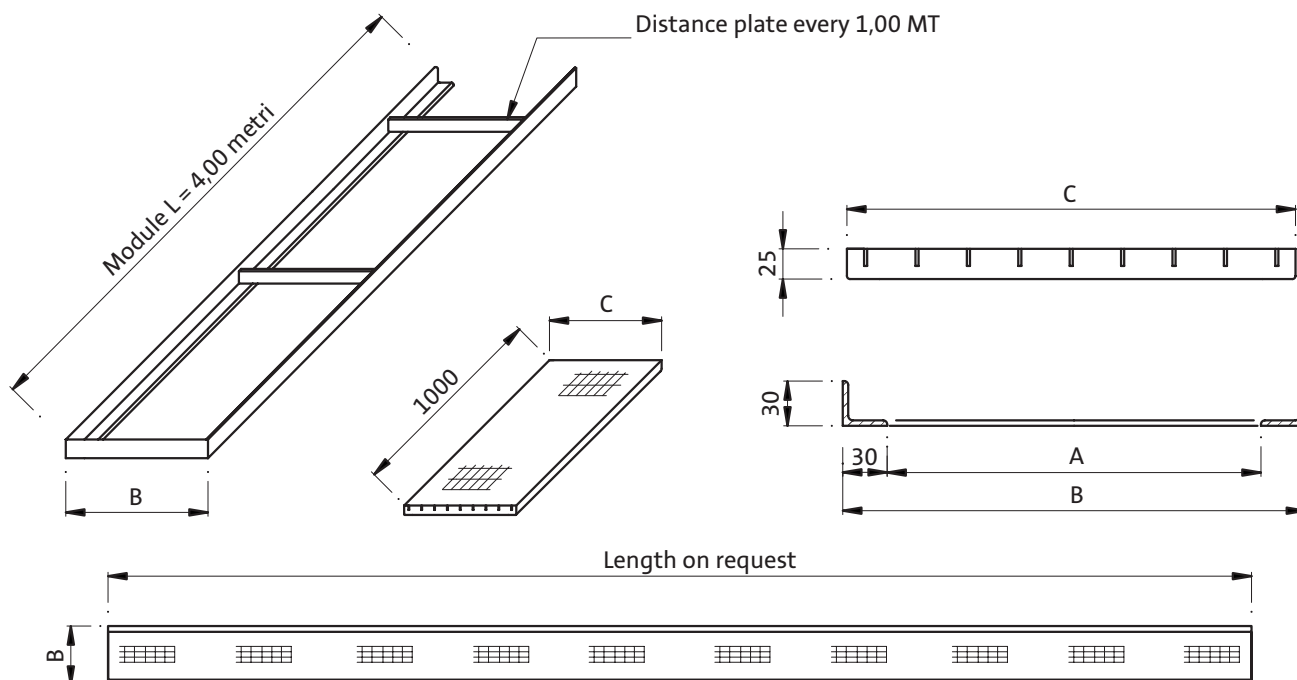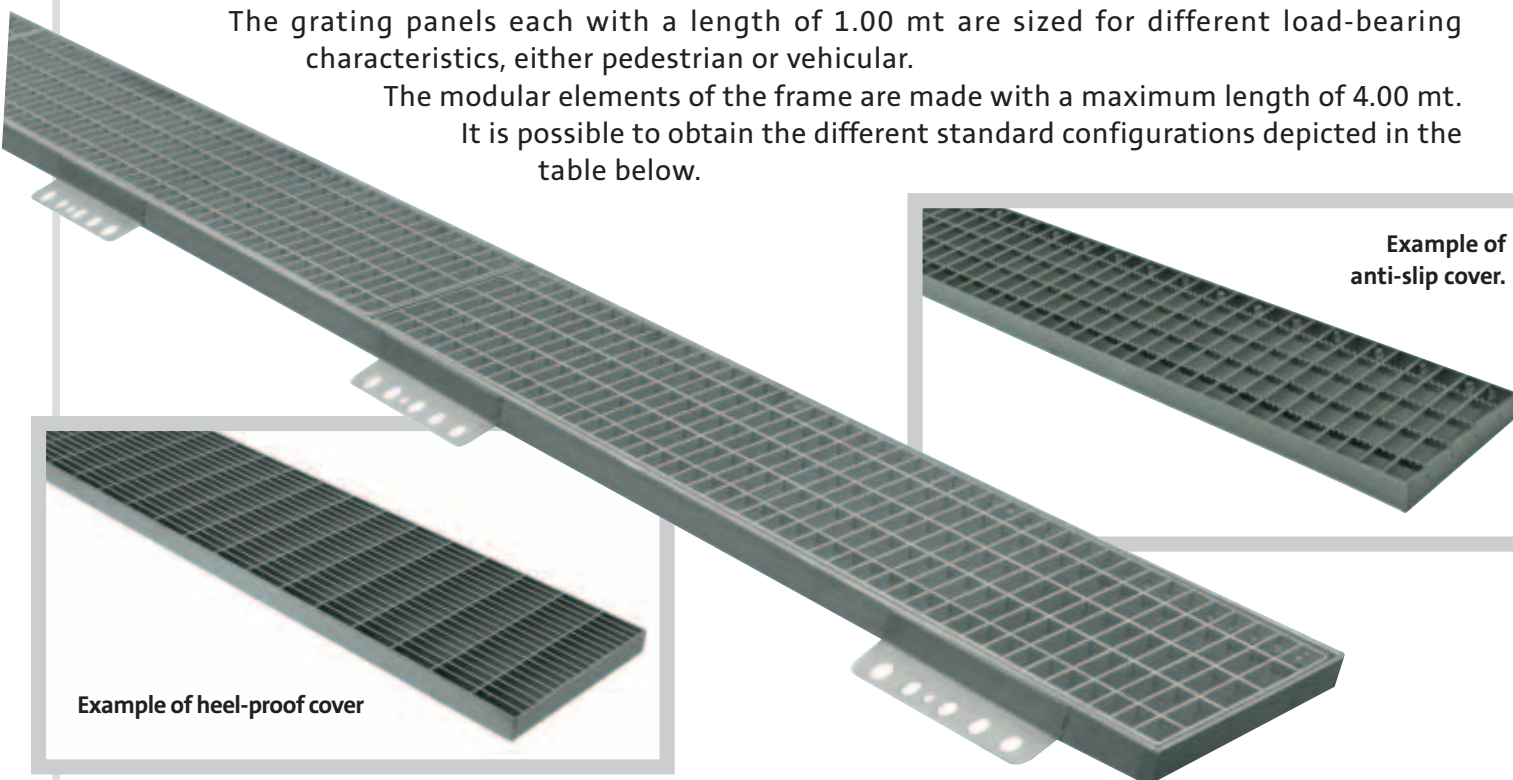

NOTE:

Available with anti-slip, heel-proof panels.

Standard dimensions			
Item	Size "A"	Size "B"	Size "C"
TGR.150	61mm	121mm	108mm
TGR.200	108mm	168mm	155mm
TGR.250	158mm	218mm	205mm
TGR.300	208mm	268mm	255mm
TGR.400	308mm	368mm	355mm

NOTES

A large rectangular area filled with a fine grid of light blue lines, intended for writing notes. The grid is contained within a blue border.

Inox pipes main diameter	
External diameter (mm) X thickness (mm)	
D. 33,7 X 2	D. 80 X 2
D. 40 X 2	D. 88,9 X 2
D. 42,4 X 2	D. 101,6 X 2
D. 48,3 X 2	D. 110 X 2
D. 50 X 2	D. 114,3 X 2
D. 52 X 2	D. 129 X 2
D. 54 X 2	D. 139,7 X 2
D. 60,3 X 2	D. 154 X 2
D. 63,5 X 2	D. 168,3 X 2
D. 75 X 2	D. 204 X 2
D. 76,1 X 2	D. 219,1 X 2

